

aerospace
 climate control
 electromechanical
 filtration
 fluid & gas handling
 hydraulics
 pneumatics
 process control
 sealing & shielding



Miniature Electronic Pressure Controllers

Precision Fluidics



ENGINEERING YOUR SUCCESS.










ENGINEERING **YOUR** SUCCESS.

When you partner with the global leader in motion and control technologies, expect to move your business and the world forward. From miniature solenoid valves to highly integrated automation systems, our innovations are critical to life-saving medical devices and scientific instruments used for drug discovery and pathogen detection. Not to mention, critical to decreasing time to market and lowering your overall cost of ownership. So partner with Parker, and get ready to move, well, anything.



Table of Contents

| | product | | page |
|---|----------------------|--------------------------------------|------|
|  | OEM -EP | Miniature Pressure Controller | 4 |
|  | VSO® -GC | Flow Control Module | 6 |
|  | VSO® -EP | Miniature Pressure Controller | 8 |
|  | VSO® -EV | Vacuum Control Module | 10 |
|  | VSO® -HP | High Performance Pressure Controller | 12 |
|  | VSO® -LP | Long Performance Pressure Controller | 14 |
|  | VSO® -BT | Benchtop Controller | 16 |
| | Offer of Sale | | 17 |

OEM-EP Miniature Pressure Controller

Pressure Controllers



Measuring just 26mm x 27mm x 60mm, the OEM-EP (Electronic Pressure Control Unit) is the smallest electronic pressure controller available on the market, configured specifically for the analytical instrumentation and life science OEM markets.

The OEM-EP can be configured to control pressure or flow and can replace manual regulators, flow controllers, and needle valves, providing integral closed loop proportional control for sensitive instrumentation applications. This product uses Parker's patented VSO® proportional valve, as well as the proven circuitry of its successful larger products.

Features

- Silent operation
- High accuracy
- "Set and Forget" closed loop control
- Low power consumption
- Long life
- Analog control

Physical Properties

Valve Technology:

Thermally compensated proportional valve

Media:

Non-corrosive gases

Operating Environment:

0 to 55°C (32 to 131°F)

Storage Temperature:

-40 to 55°C (-40 to 131°F)

Length:

1.02 in (26 mm)

Width:

1.06 in (27 mm)

Height:

2.36 in (60 mm)

Porting:

10-32 female ports

Electrical

Main Power:

24 VDC \pm 10%

Input Control Signal:

0-5 VDC standard

Monitor Output Voltage:

0-5 volts

Current Requirement:

<150 mA

Electrical Connector:

6 pin miniature interface cable included

Performance Characteristics

Pressure Ranges:

| | |
|------------|------------|
| 0-2 psig | 0-5 psig |
| 0-7 psig | 0-15 psig |
| 0-30 psig | 0-50 psig |
| 0-100 psig | 0-120 psig |

Pressure Accuracy:

\pm 0.2% FS typical*
 \pm 1.5% FS max

Response:

<15 msec
(Response time to target pressure is output volume dependent)

Linearity:

< \pm 1.0% FS


Maximum Supply Pressure:

150% of pressure transducer rating

VSO is a registered trademark of Parker Hannifin Corporation. *Contact factory for details.


Configurations

Custom configurations are available. Contact factory for details.

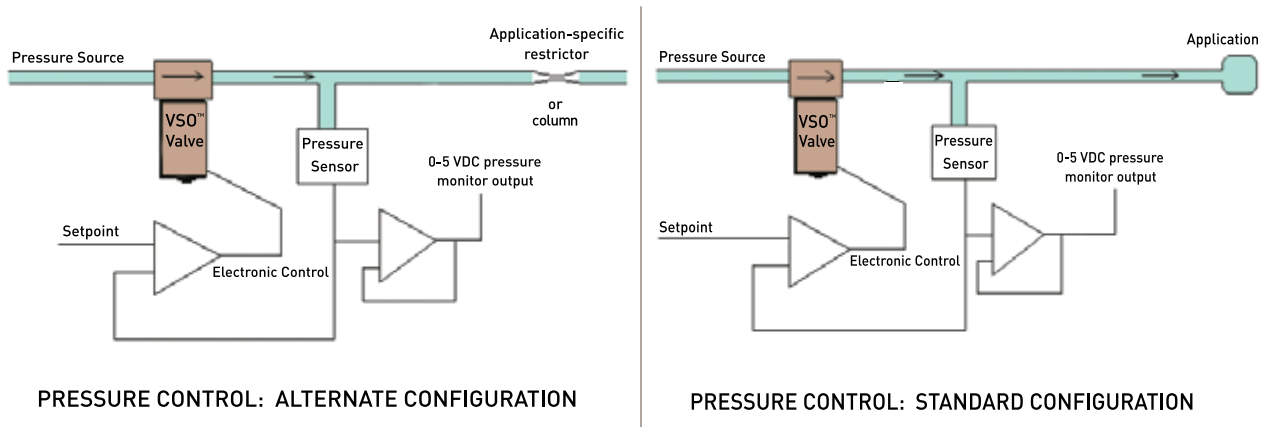

OEM-EP Pressure Controllers

Dimensions

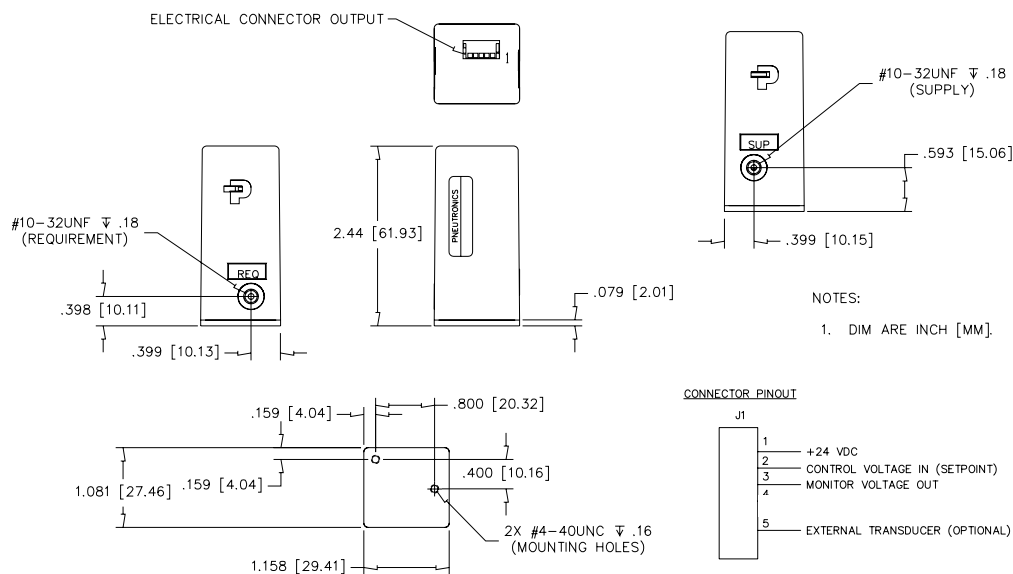

Ordering Information

| part description | part number | | | | | |
|------------------------------|----------------|----------------|----------------|----------------|----------------|----------------|
| | 990-005101-002 | 990-005101-015 | 990-005101-100 | 990-005103-002 | 990-005103-015 | 990-005103-100 |
| Family | OEM-EP | OEM-EP | OEM-EP | OEM-EP | OEM-EP | OEM-EP |
| Configuration ¹ | Standard | Standard | Standard | Standard | Standard | Standard |
| Effective orifice | 0.01 | 0.01 | 0.01 | 0.03 | 0.03 | 0.03 |
| Power | 24 vdc | 24 vdc | 24 vdc | 24 vdc | 24 vdc | 24 vdc |
| Control Voltage ² | 0-5 vdc | 0-5 vdc | 0-5 vdc | 0-5 vdc | 0-5 vdc | 0-5 vdc |
| Pressure range | 0 - 2 psig | 0 - 15 psig | 0 - 100 psig | 0 - 2 psig | 0 - 15 psig | 0 - 100 psig |
| Buy Online | Y | Y | Y | Y | Y | Y |

¹ Standard Configurations have a slight constant bleed to atmosphere to accurately control pressure and are typically used to pressurize closed volumes of inert gasses. Alternate Configuration are typically selected for gas flow applications and do not have an internal bleed.

² Control starts at approximately 10% of full scale control voltage and pressure applications allowing for positive shutoff. Pressure control may not be possible below 10% of full scale rating.

NOTE: Please consult Parker Precision Fluidics for other considerations. For more detailed information, visit us at www.parker.com/precisionfluidics, or call and refer to Performance Spec. #790-002131-001 and Drawing #890-003079-001.

Order on-line at www.parkerfluidics.com or call 1 603 595 1500



VSO-GC Flow Control Module

Pressure Controllers



The VSO-GC, Electronic Pressure Control (EPC) Unit, converts a variable electrical control signal into a variable pneumatic output. By providing integral closed loop control, it replaces manual regulators, costly multiple function control valves, and needle valves. This product uses Parker Hannifin's patented VSOTM proportional valve and offers application-specific integrated pneumatic pressure control for Gas Chromatography (GC) applications.

Typical applications include:

- Column Head Pressure Control
- Split Flow Control
- Carrier Gas Flow Control

Features

- Silent operation
- Long life
- High accuracy
- Unparalleled resolution
- GC-specific proportional valve
- Internal closed loop control
- Pressure signal output
- Analog control

Physical Properties

| |
|--|
| Valve Technology: |
| Thermally compensated proportional valve |
| Media: |
| Non-corrosive gases |
| Operating Environment: |
| 0 to 55°C (32 to 131°F) |
| Storage Temperature: |
| -40 to 55°C (-40 to 131°F) |
| Length: |
| 2.25 in (57.15 mm) |
| Width: |
| 2.25 in (57.15 mm) |
| Height: |
| 1.25 in (31.75 mm) |
| Porting: |
| 10-32 female ports |

Electrical

| |
|---------------------------------------|
| Power: |
| 24 VDC \pm 10% |
| Input Control Signal: |
| 0-5 VDC standard 4-20 mA available |
| Monitor Output Voltage: |
| 0-5 volts |
| Current Requirement: |
| <150 mA |
| Electrical Connector: |
| RJ-45 |


Performance Characteristics

| |
|---|
| Pressure Ranges: |
| 0-15 psig 0-30 psig 0-50 psig 0-100 psig |
| Pressure Accuracy: |
| \pm 0.2% FS typical* \pm 1.5% FS max |
| Response: |
| <15 msec (Response time to target pressure is output volume dependent) |
| Linearity: |
| < \pm 1.0% FS |
| Maximum Supply Pressure: |
| 150% of pressure transducer rating |


VSO is a registered trademark of Parker Hannifin Corporation. *Contact factory for details.

VSO-GC Pressure Controllers

Dimensions

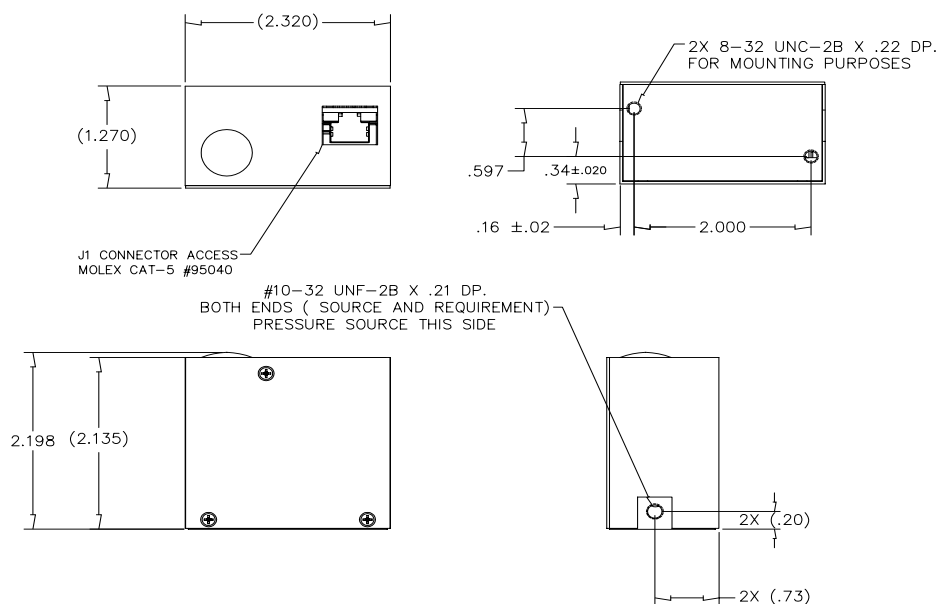

Configuration

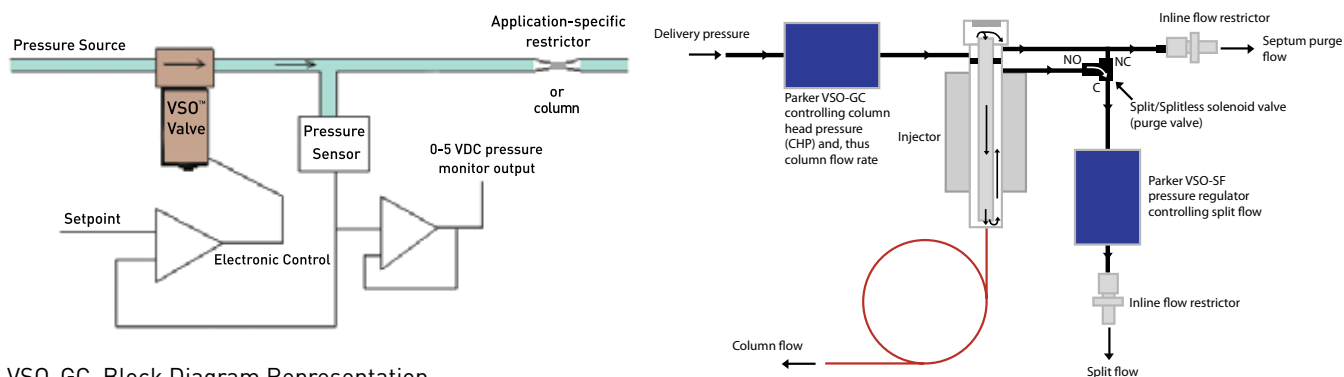

VSO-GC Block Diagram Representation

Ordering Information

| Sample Part ID | VSO-GC | GC | 0-5 | 0-100* |
|----------------|--------|------------------------------|---------------------------|---|
| Description | Series | Configuration | Electrical Input | Column Head Pressure |
| Options | VSO-GC | GC: Head Pressure Controller | 0-5: 0-5 VDC ¹ | 0-2, 5, 7, 15, 30, 50, 70, 100 (psi) * Not required for SF |

NOTE: Please consult Parker Precision Fluidics for other considerations. For more detailed information, visit us on the Web, or call and refer to Performance Spec. #790-002202-002 and Drawing #890-003146-002.

¹ Control starts at approximately 10% of full scale control voltage and pressure rating allowing for positive shutoff. Pressure control may not be possible below 10% of full scale rating.

| CAT 5e Plug-in (RJ-45) Connector (included) | |
|---|-------------------|
| Signal | RJ-45 Pin # Color |
| Main Power, 24 VDC | 1 White w/ Orange |
| Input Control Signal, 0-5 VDC | 2 Solid Orange |
| Monitor Signal Output, 0-5 VDC | 3 White w/ Green |
| System Ground | 4 Solid Blue |

To order, call 1 603 595 1500



VSO-EP Miniature Pressure Controller

Pressure Controllers



The VSO-EP™ Electronic Pressure Control Unit converts a variable electrical control signal into a variable pneumatic output. Used to control critical pressure, the VSO-EP replaces manual regulators, needle valves, flow controllers, and bleed orifices, providing integral closed loop proportional control. This product uses Pneutronics' patented VSO® proportional valve and offers significant improvements over dual valve controllers. VSO-EP is used for carrier gas flow control, microfluidic flow control, vacuum pump control, and for aspirate/dispense applications.

Features

- Offers silent operation
- Ensures high accuracy and unparalleled resolution
- Tested for long life
- Offers internal closed loop control and external pressure sensor capability*
- OEM application-specific configurations available
- Analog control

*Accessories Required

Physical Properties

| |
|--|
| Valve Technology: |
| Thermally compensated proportional valve |
| Media: |
| Non-corrosive gases |
| Operating Environment: |
| 0 to 55°C (32 to 131°F) |
| Storage Temperature: |
| -40 to 55°C (-40 to 131°F) |
| Length: |
| 2.25 in (57.15 mm) |
| Width: |
| 2.25 in (57.15 mm) |
| Height: |
| 1.25 in (31.75 mm) |
| Porting: |
| 10-32 female ports |

Electrical

| |
|---------------------------------------|
| Power: |
| 24 VDC + 10% 12, 15 available |
| Input Control Signal: |
| 0-5 VDC standard 4-20 mA available |
| Monitor Output Voltage: |
| 0-5 volts |
| Current Requirement: |
| <150 mA |
| Electrical Connector: |
| RJ-45 |


Performance Characteristics

| |
|--|
| Pressure Ranges: |
| 0-15 psig 0-50 psig 0-100 psig |
| Pressure Accuracy: |
| ± 0.2% FS typical* ± 1.5% FS max |
| Response: |
| <15 msec <i>(Response time to target pressure is output volume dependent)</i> |
| Linearity: |
| ≤ +1.0% FS |
| Maximum Supply Pressure: |
| 150% of pressure transducer rating |

VSO is a registered trademark of Parker Hannifin Corporation.*Contact factory for details.

VSO-EP Pressure Controllers

Dimensions

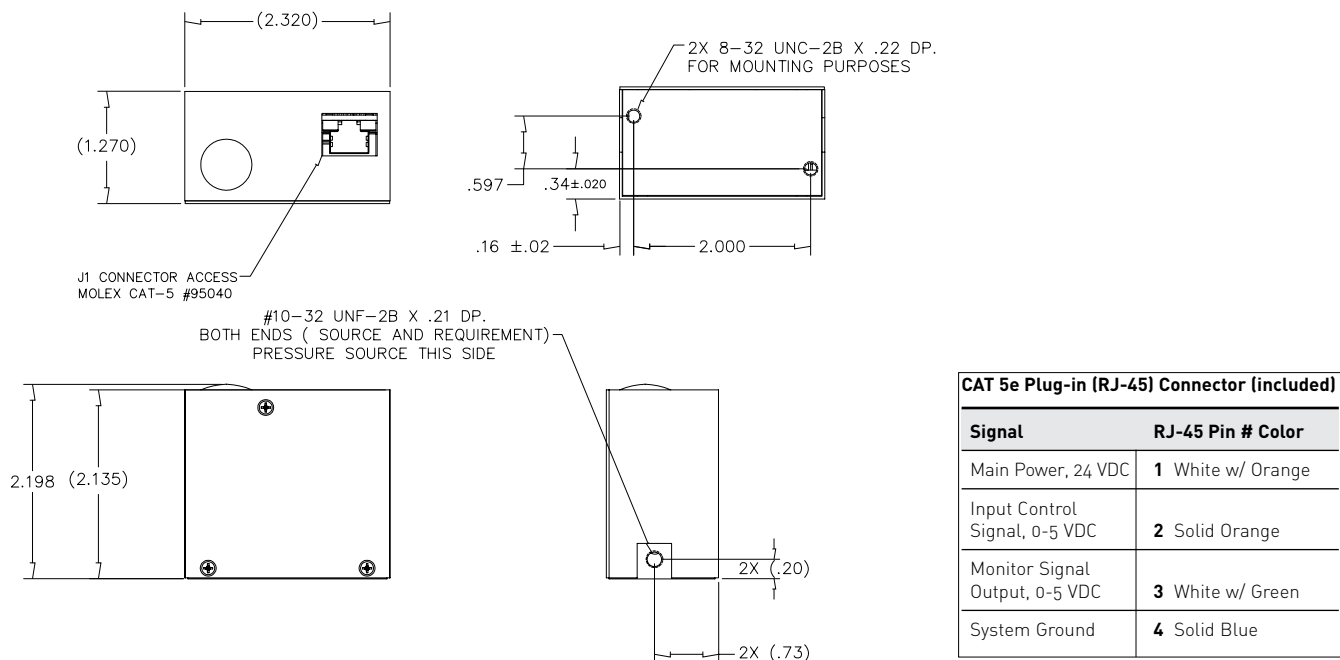

Ordering Information

| | part number | | | | |
|------------------|------------------------------|----------------|----------------|----------------|----------------|
| | 990-005000-100 | 990-005001-015 | 990-005001-050 | 990-005001-100 | 990-005003-015 |
| part description | Family | VSO-EP | VSO-EP | VSO-EP | VSO-EP |
| | Configuration ¹ | Standard | Standard | Standard | Standard |
| | Effective orifice | 0.003 | 0.01 | 0.01 | 0.03 |
| | Power | 24 vdc | 24 vdc | 24 vdc | 24 vdc |
| | Control Voltage ² | 0-5 vdc | 0-5 vdc | 0-5 vdc | 0-5 vdc |
| | Pressure range | 0 - 100 psig | 0 - 15 psig | 0 - 50 psig | 0 - 100 psig |
| | Buy Online | N | Y | Y | Y |

| | part number | | | |
|------------------|------------------------------|----------------|----------------|----------------|
| | 990-005003-050 | 990-005003-100 | 990-005011-015 | 990-005011-050 |
| part description | Family | VSO-EP | VSO-EP | VSO-EP |
| | Configuration ¹ | Standard | Standard | Alternate |
| | Effective orifice | 0.03 | 0.03 | 0.01 |
| | Power | 24 vdc | 24 vdc | 24 vdc |
| | Control Voltage ² | 0-5 vdc | 0-5 vdc | 0-5 vdc |
| | Pressure range | 0 - 50 psig | 0 - 100 psig | 0 - 15 psig |
| | Buy Online | Y | Y | Y |



¹ Standard Configurations have a slight constant bleed to atmosphere to accurately control pressure and are typically used to pressurize closed volumes of inert gasses.

Alternate Configuration are typically selected for gas flow applications and do not have an internal bleed.

² Control starts at approximately 10% of full scale control voltage and pressure rating allowing for positive shutoff.

Pressure control may not be possible below 10% of full scale rating.

NOTE: Please consult Parker Precision Fluidics for other considerations. For more detailed information, visit us on the Web, or call and refer to Performance Spec. #790-002202-001 and Drawing #890-003146-001.

Order on-line at www.parkerfluidics.com or call 1 603 595 1500



VSO-EV Vacuum Control Module

Pressure Controllers



The VSO-EV™ is a pressure controller specifically configured and optimized for vacuum pressure control. The VSO-EV converts a variable electrical control signal into a closed-loop, tightly regulated pneumatic output. Often used for aspirating liquid samples, as well as for pipetting and dispensing nano-liter volumes, the VSO-EV offers users an internal sensor to close the control loop around critical system parameters. This EVC is well suited for high precision automated laboratory instruments, meeting the most stringent separation and detection requirements.

Features

- Low weight and low power consumption
- Ensures high accuracy and unparalleled resolution
- Tested for long life
- Offers internal closed loop control and external pressure sensor capability*
- OEM application-specific configurations available
- Analog control

*Accessories Required

Physical Properties

| |
|--|
| Valve Technology: |
| Thermally compensated proportional valve |
| Media: |
| Non-corrosive gases |
| Operating Environment: |
| 0 to 55°C (32 to 131°F) |
| Storage Temperature: |
| -40 to 55°C (-40 to 131°F) |
| Length: |
| 2.25 in (57.15 mm) |
| Width: |
| 2.25 in (57.15 mm) |
| Height: |
| 1.25 in (31.75 mm) |
| Porting: |
| 10-32 female ports |

Electrical

| |
|---------------------------------------|
| Power: |
| 24 VDC \pm 10% |
| Input Control Signal: |
| 0-5 VDC standard 4-20 mA available |
| Monitor Output Voltage: |
| 0-5 volts |
| Current Requirement: |
| <150 mA |
| Electrical Connector: |
| RJ-45 |


Performance Characteristics

| |
|---|
| Vacuum Ranges: |
| 0-345 mBar Custom units available |
| Pressure Accuracy: |
| \pm 0.2% FS typical* \pm 1.5% FS max |
| Response: |
| <15 msec (Response time to target pressure is output volume dependent) |
| Linearity: |
| < \pm 1.0% FS |
| Maximum Supply Pressure: |
| 150% of pressure transducer rating |

VSO is a registered trademark of Parker Hannifin Corporation. *Contact factory for details.


VSO-EV Pressure Controllers

Dimensions

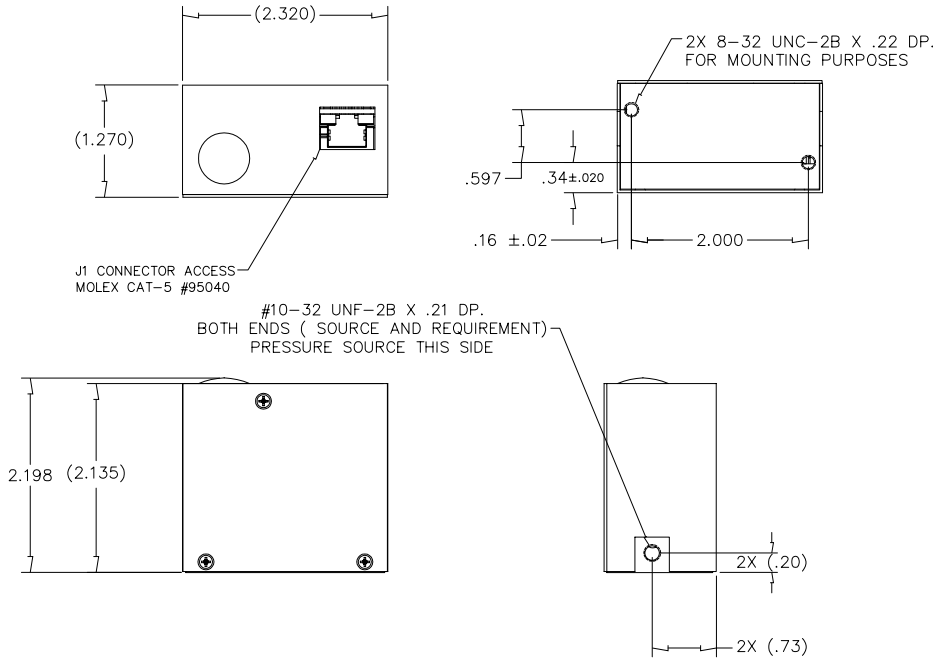

| CAT 5e Plug-in (RJ-45) Connector (included) | |
|---|-------------------|
| Signal | RJ-45 Pin # Color |
| Main Power, 24 VDC | 1 White w/ Orange |
| Input Control Signal, 0-5 VDC | 2 Solid Orange |
| Monitor Signal Output, 0-5 VDC | 3 White w/ Green |
| System Ground | 4 Solid Blue |

Configuration

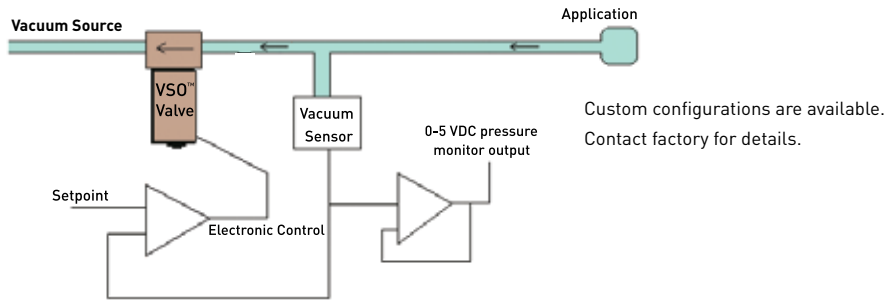

VACUUM CONTROL: STANDARD CONFIGURATION



Ordering Information

| Sample Part ID | VSO-EV | EV | 0-5 | 0-VAC |
|----------------|--------|----------------------------|---------------------------|--|
| Description | Series | Configuration ¹ | Electrical Input | Pneumatic Range |
| Options | VSO-EV | EV: Vacuum Controller | 0-5: 0-5 VDC ² | 0-VAC: 0-VAC* * 0 to -345 mBar for vacuum; Consult factory for custom options |

¹ Standard Configurations have a slight constant bleed to atmosphere to accurately control pressure and are typically used to pressurize closed volumes of inert gasses. Alternate Configuration are typically selected for gas flow applications and do not have an internal bleed.

² Control starts at approximately 10% of full scale control voltage and pressure rating allowing for positive shutoff.

Pressure control may not be possible below 10% of full scale rating.

NOTE: Please consult Parker Precision Fluidics for other considerations. For more detailed information, visit us on the Web, or call and refer to Performance Spec. #790-002202-001 and Drawing #890-003146-001.

Order on-line at www.parkerfluidics.com or call 1 603 595 1500



VSO-HP High Performance Pressure Controller

Pressure Controllers



Used in analytical and OEM instrument applications, the VSO-HP delivers integral closed loop proportional control with the highest level of accuracy and stability.

With an extra internal dump valve, the VSO-HP offers rapid depressurization, which results in a fast response time and has an optional external sensor for expertly controlling pressure in required applications.

The VSO-HP can be configured to control pressure or flow, replacing manual regulators, flow controllers, and needle valves. This product uses Parker's patented VSO® proportional valve and offers precise motion control with Parker pneumatic cylinders, such as the Series SRX.

Typical applications include:

- Gas over liquid flow control
- Microfluidic flow control
- Hydro-dynamic focusing
- Liquid dispensing

Features

- Stable pressure control with minimal thermal drift
- Rapid depressurization
- High accuracy; high repeatability
- Low power consumption
- Optional 5 VDC supply output
- Configurable for pressure control or flow control
- External pressure sensor capability
- Silent operation; long life
- Analog control

Physical Properties

Valve Technology:

Thermally compensated proportional valve, digital dump valve

Media:

Non-corrosive gases

Operating Environment:

0 to 55°C (32 to 131°F)

Storage Temperature:

-40 to 55°C (-40 to 131°F)

Length:

1.52 in (39 mm)

Width:

1.66 in (42 mm)

Height:

2.79 in (71 mm)

Porting:

10-32 female ports

Electrical

Power:

24 VDC + 10%

Input Control Signal:

0-5 VDC standard

Monitor Output Voltage:

0-5 volts

Current Requirement:

<250 mA

Electrical Connector:

6 pin miniature interface cable included

Performance Characteristics

Pressure Ranges:

0-5 psig 0-7 psig
0-15 psig 0-100 psig

Pressure Accuracy:

± 0.2% FS typical*
± 1.5% FS max

Response:

<15 msec
(Response time to target pressure is output volume dependent)

Linearity:

< ±1.0% FS




Maximum Supply Pressure:

150% of pressure transducer rating


VSO is a registered trademark of Parker Hannifin Corporation. *Contact factory for details.

VSO-HP Pressure Controllers


Dimensions

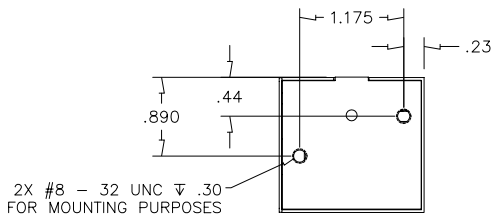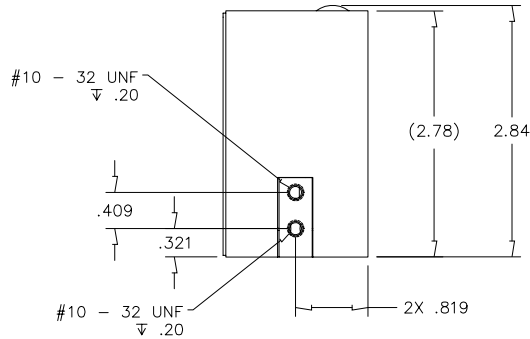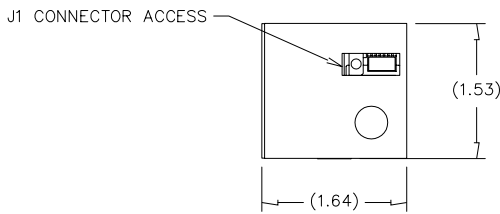

CONNECTOR PINOUT

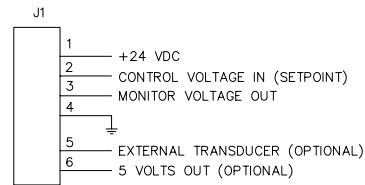

Configuration

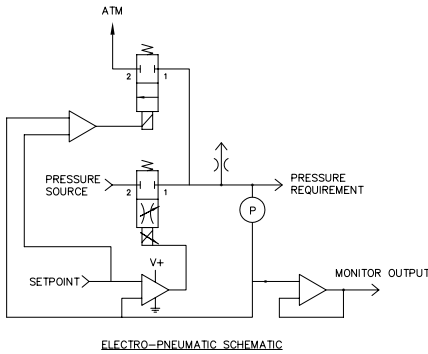

Custom configurations are available.
Contact factory for details.

Ordering Information

| | | part number | | | | | |
|------------------|------------------------------|----------------|----------------|----------------|----------------|----------------|----------------|
| | | 990-005303-005 | 990-005303-015 | 990-005303-100 | 990-005311-007 | 990-005311-015 | 990-005311-100 |
| part description | Family | VSO-HP | VSO-HP | VSO-HP | VSO-HP | VSO-HP | VSO-HP |
| | Configuration ¹ | Standard | Standard | Standard | Alternate | Alternate | Alternate |
| | Effective Orifice | 0.03 | 0.03 | 0.03 | 0.01 | 0.01 | 0.01 |
| | Relief Valve Orifice | 0.03 | 0.03 | 0.03 | 0.03 | 0.03 | 0.03 |
| | Power | 24 vdc | 24 vdc | 24 vdc | 24 vdc | 24 vdc | 24 vdc |
| | Control Voltage ² | 0-5 vdc | 0-5 vdc | 0-5 vdc | 0-5 vdc | 0-5 vdc | 0-5 vdc |
| | Pressure Range | 0 - 5 psig | 0 - 15 psig | 0 - 100 psig | 0 - 7 psig | 0 - 15 psig | 0 - 100 psig |
| | Buy Online | N | Y | Y | N | N | N |

¹ Standard Configurations have a slight constant bleed to atmosphere to accurately control pressure and are typically used to pressurize closed volumes of inert gasses. Alternate Configuration are typically selected for gas flow applications and do not have an internal bleed.

² Control starts at approximately 10% of full scale control voltage and pressure rating allowing for positive shutoff. Pressure control may not be possible below 10% of full scale rating.

NOTE: Please consult Parker Precision Fluidics for other considerations. For more detailed information, visit us on the Web.

To order, call 1 603 595 1500



VSO-LP Long Performance Pressure Controller

Pressure Controllers



The VSO-LP series provides single channel "I to P" control for industrial applications requiring long life and high accuracy. This voltage sensitive module promotes consistent, accurate flow while offering rapid depressurization. It incorporates an onboard sensing transducer and a VSO® patented proportional valve, plus a long life digital valve.

Features

- Output pressure control
- Rapid depressurization
- High accuracy; high repeatability
- Low power consumption
- On-board pressure sensing transducer
- Silent operation; long life
- Analog control

Physical Properties

| |
|---|
| Valve Technology: |
| Non-thermally compensated proportional valve, bleed valve |
| Media: |
| Non-corrosive gases |
| Operating Environment: |
| 0 to 50°C (32 to 122°F) |
| Storage Temperature: |
| -40 to 65°C (-40 to 149°F) |
| Length: |
| 1.52 in (39 mm) |
| Width: |
| 1.66 in (42 mm) |
| Height: |
| 2.79 in (71 mm) |
| Porting: |
| 10-32 female ports |

Electrical

| |
|--|
| Power: |
| 24 VDC + 10% |
| Input Control Signal: |
| 0-5 VDC standard 4-20 mA available |
| Monitor Output Voltage: |
| 0-5 volts |
| Current Requirement: |
| <250 mA |
| Electrical Connector: |
| 6 pin miniature interface cable included |


Performance Characteristics

| |
|--|
| Pressure Ranges: |
| 0-15 psig 0-100 psig |
| Pressure Accuracy: |
| ± 1.5% FS max |
| Response: |
| <15 msec <i>(Response time to target pressure is output volume dependent)</i> |
| Linearity: |
| < ±1.5% FS |
| Maximum Supply Pressure: |
| 150% of pressure transducer rating |


VSO is a registered trademark of Parker Hannifin Corporation.

VSO-LP Pressure Controllers

Dimensions

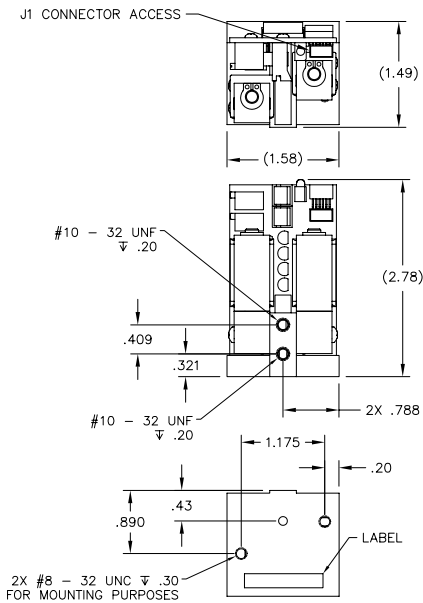


Configuration

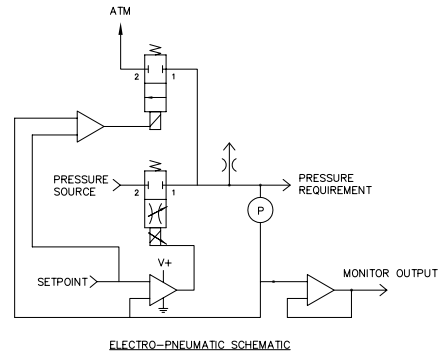

ELECTRO-PNEUMATIC SCHEMATIC

CONNECTOR PINOUT



Custom configurations are available. Contact factory for details.

Ordering Information

| | part number | |
|------------------------------|----------------|----------------|
| | 990-005503-015 | 990-005503-100 |
| Family | VSO-LP | VSO-LP |
| Configuration ¹ | Standard | Standard |
| Effective Orifice | 0.03 | 0.03 |
| Relief Valve Orifice | 0.03 | 0.03 |
| Power | 24 vdc | 24 vdc |
| Control Voltage ² | 0-5 vdc | 0-5 vdc |
| Pressure Range | 0 - 15 psig | 0 - 100 psig |
| Buy Online | Y | Y |

NOTE: Please consult Parker Precision Fluidics for other considerations. For more detailed information, visit us on the Web.

¹ Standard Configurations have a slight constant bleed to atmosphere to accurately control pressure and are typically used to pressurize closed volumes of inert gasses. Alternate Configuration are typically selected for gas flow applications and do not have an internal bleed.

² Control starts at approximately 10% of full scale control voltage and pressure rating allowing for positive shutoff. Pressure control may not be possible below 10% of full scale rating.

To order, call 1 603 595 1500



VSO-BT Benchtop Controller

Pressure Controllers



The VSO-BT Electronic Benchtop pressure controller combines the closed loop performance features of OEM-grade electronic pressure controllers into a form factor suitable for laboratory and prototype development work. Used in microfluidic and life science research, this unit replaces manual regulators, sensors, gauges, and tubing assemblies while providing considerably better pressure accuracy and eliminating pressure drift and fluctuation.

Typical applications include:

- Liquid Piloting
- Microfluidics
- Cytometry Research
- Oocyte Chambers

Features

- Simple adjustment of closed-loop pressure set points via front panel knob
- Electrical inputs for high resolution set points
- Set and display pressure in your choice of units
- Optional I/O hook-ups allow high resolution and/or remote operation
- Quick disconnect fittings for easy pneumatic connection

Physical Properties

Media:

Air and non-corrosive gasses

Operating Environment:

0 to 55°C (32 to 131°F)

Storage Temperature:

-40 to 55°C (-40 to 131°F)

Dimensions (W x L x H):

5.08 x 5.25 x 2.25 in
(129 x 133 x 57 mm)

Weight:

2 lbs (907 grams)

Electrical

Input Power:

100 - 240 VAC* (50-60 Hz)
*power supply and 6ft. cord included

I / O:

0-5 VDC analog input for high resolution (0.001 psi) pressure set points
0-5 VDC monitor output signal allows high resolution (0.001 psi)

LED Display

3 digit visual (0.375" height)
with choice of pressure units
(see chart below)

Refresh rate

0.1 sec

Performance Characteristics

Pneumatic

Includes 2 pcs of Parker Presto-Loc quick disconnect fittings for ¼" urethane tubing

Recommended Pressure Source:



120% rated pressure

Accessories (not included)

Burst proof air-over-liquid piloting chamber

VSO-BT Pressure Controllers

Dimensions

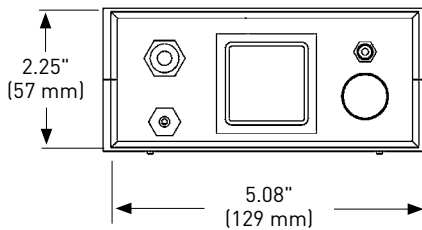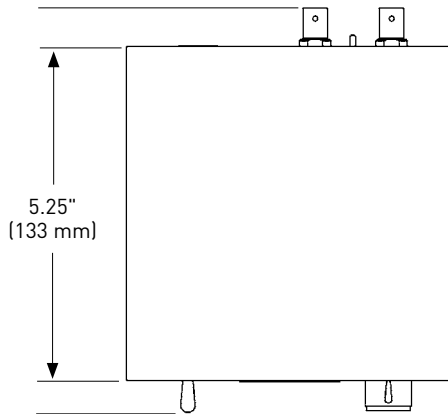

Electrical Connections



FRONT



BACK



Ordering Information

| MODEL | VSO-BT-015 | VSO-BT-050 | VSO-BT-100 |
|---|------------|------------|------------|
| Pressure Range (psig) | 0-14.7 | 0-50 | 0-100 |
| Actual Resolution from monitor signal (psi) | 0.001 | 0.001 | 0.001 |
| Display Resolution (psi) | 0.1 | 0.1 | 1 |
| Display Resolution (bar) | 0.001 | 0.01 | 0.01 |
| Display Resolution (kPa) | 0.1 | 1 | 1 |
| Display Resolution (Kgf/cm ²) | 0.001 | 0.01 | 0.01 |
| Repeatability of Pressure Control | 0.2%FS | 0.2%FS | 0.2%FS |

NOTE: Please consult Parker Precision Fluidics for other considerations. For more detailed information, visit us on the Web.

Order on-line at www.parkerfluidics.com or call 1 603 595 1500



TERMS AND CONDITIONS OF SALE

1. APPLICABLE LAW: This order shall be only subject to the terms and conditions set forth herein, notwithstanding any terms and conditions that may be contained in any order acknowledgment or other form of Buyer. Such terms and conditions of Buyer shall not bind the Seller unless accepted by it in writing whether or not they materially alter this order. This order shall be governed in all respects by the laws of the State of New Hampshire.

2. TAXES: Prices do not include Federal, State or local taxes, including without limitation, which taxes may at Seller's discretion be added to sales price or may be billed separately and which taxes will, in any event, be paid by Buyer unless Buyer provides Seller with a proper tax exemption certificate.

3. TERMS OF PAYMENT: Unless otherwise stated on Seller's invoices, terms of payment shall be Net 30 days from date of invoice. If at any time Seller in its sole discretion determines an alternative payment arrangement would be prudent, Seller may require Letter of Credit, Cash on Delivery, advance or other acceptable means of payment. If requirements of Seller are not met, Seller may cancel the order or any part thereof and receive reasonable cancellation fees.

4. DELIVERY: Seller shall not be liable for any delays in or failure of delivery due to acts of God or public authority, labor disturbances, accidents, fires, floods, extreme weather conditions, failure of any carriers, shortages of material, delays of a supplier or any other cause beyond Seller's control. In no event shall the Seller be liable for consequential or special damages arising out of a delay in or failure of delivery. Buyer's requested delivery date or schedule shall be approximate and subject to Seller's acceptance.

5. TERMINATION OF CONTRACT: Orders accepted by the Seller may be cancelled by Buyer only with the consent of Seller and upon payment of reasonable cancellation charges, determined by Seller in its sole discretion. Seller shall have the right without penalty or payment to cancel any order accepted or to refuse or delay the shipment thereof if (1) Buyer fails to make promptly any payment due, or to meet any other reasonable requirements established by Seller, (2) Buyer's act or omission to act delays Seller's performance, or (3) Buyer's credit becomes impaired, in the Seller's sole judgment. In such event, Seller shall be entitled to receive reimbursement for reasonable and proper cancellation charges.

6. CHANGES IN SPECIFICATIONS OR DESIGN: If Buyer requests changes in specifications or designs relating to any goods, delivery schedules shall be revised if necessary, and an equitable adjustment upward or downward shall be made in price if warranted.

7. FREIGHT: Carriers will be selected by the Seller unless the Buyer instructs otherwise in writing. All shipments will be F.O.B. Seller's plant. Standard freight charges for equipment required under warranty will be paid by Pneutronics. Buyer's request for alternative means will be charged additional freight as required.

8. CONSEQUENTIAL DAMAGES: In no event shall Seller be liable for consequential or special damages arising out of delay in or failure of delivery, defects in material, or workmanship or arising out of a breach by Seller of any other term or obligation of the Seller under this contract.

9. GOVERNMENT CONTRACTS: If the products to be furnished under this contract are to be used in the performance of a United States Government Contract or sub-contract, the government contract number, priority rating and a statement to that effect shall appear on the Buyer's purchase order. If the Buyer's purchase order includes all of said information and if said order is accepted in writing by an authorized officer of Seller with knowledge of said information, then those clauses of the applicable government procurement regulations which are mandatorily required by Federal Statute or regulation to be included in this contract shall be incorporated herein by reference, in all other events said clauses shall not be incorporated herein by reference.

10. PROPRIETARY INFORMATION: Buyer represents that it has adopted reasonable procedures to protect proprietary information as defined hereafter including binding agreements with employees and consultants to prevent unauthorized publication, disclosure, or use of such information during or after the term of their employment by or services for Buyer. Buyer shall not use proprietary information except as expressly permitted hereunder, shall not disclose proprietary information of Seller to any third party and shall not transmit any documents or copies thereof containing proprietary information to any third party except as may be authorized in writing by Seller.

11. PATENT INDEMNITY: Seller shall have no liability for patent infringement unless the goods furnished hereunder, in an of themselves, constitute the infringement. If they do, and Seller is notified of the class of infringement within ten days after such claim is received by the Buyer and permitted to settle or defend such claim, Seller will indemnify the Buyer against reasonable expense of defending suit and against any judgement or settlement to which Seller agrees. However, such indemnity will be limited to an amount not exceeding the price paid by Buyer to Seller for the infringing goods. If an injunction is issued against the further use of the goods, Seller will have the option of either procuring for the Buyer the right to use the goods, replacing them with non-infringing goods, modify them so that they become non-infringing, or refunding the purchase price. The foregoing constitutes Seller's entire warranty and liability as to patents. If the goods furnished hereunder are in accordance with a design furnished by the Buyer, the Buyer will defend and hold harmless Seller from all cost, expenses and judgements on accounts of any claim of infringement of any patent.

12. WARRANTIES:

A. Equipment: Seller warrants that all equipment manufactured by it shall be free from defects in material or workmanship under normal use for a period of one (1) year from date of shipment to Buyer and upon examination of Seller determines to its satisfaction that such equipment is defective in material or workmanship and such defect was not caused by accident, misuse, neglect, alteration, improper adjustment, improper repair, improper application, or improper testing. Seller shall at its option repair or replace the equipment, shipment to Buyer prepaid. Seller does not recommend its products for use in life support systems.

B. The foregoing are in lieu of all representations, warranties and covenants, express or implied, with respect to the products and any defects therein of any nature whatever, including without limitation, warranties of merchantability and fitness for a particular purpose. Seller's sole and exclusive liability, and Buyer's sole and exclusive remedy, for any nonconformity or defect in the products in tort (including negligence), contract, or otherwise, shall be as set forth in Section 12A.

ORDER POLICIES & PRODUCT WARRANTY INFORMATION

Pricing and Lead Time

Standard Prices and lead times are as indicated on the current published Standard Price List and Discount Schedule.

Non-standard pricing (other than that contained in the published Price List) must be approved by Parker Precision Fluidics and a formal quotation must be submitted to the customer.

Quantity discounts for similar product are as noted on the Standard Price List and Discount Schedule.

All shipments are FCA factory (payable in US dollars).

The Standard Price List and Discount Schedule are subject to change.

All price quotations are valid for a period of 90 days.

Payment and Credit Terms

Payment terms are 1% 10, 25 net 30 as noted below:

*For invoices dated between the 1st and 15th, payments must be received by the 25th of the month.

*For invoices dated between the 16th and 31st, payments must be received by the 10th of the following month.

The above payment terms and discount are available to all customers with established credit. Otherwise, the following special terms exist:

COD for non-established domestic customers for orders greater than \$1,000.

Cash in Advance for non-established foreign customers for orders greater than \$1,000.

Standard payment terms will be established upon corporate credit approval.

Credit card sales will be accepted from customers with established credit.

Order Policies

A hard copy Purchase Order confirmation must be provided for all orders. This copy may be sent via fax or Internet e-mail provided it is signed by the authorized buyer.

Minimum order/shipment is \$250.00 Net. All sales transactions totaling \$2,500 or less will be processed via credit card only.

Distributor/Contract Mfg. Orders: All distributors and contract manufacturers are required to report end customer information at the time of order. Orders will not be processed by Parker Precision Fluidics until such information is provided.

Blanket Orders: Orders consisting of multiple releases must be completed within a twelve (12) month (A.R.O.) period unless other terms have been agreed upon prior to acceptance of the order. Blanket Orders are subject to back billing (and billing) as indicated below.

Standard Product: If at the end of the contract period the full quantity has not been released and shipped, the entire order will be re-priced at the applicable discount for quantity shipped.

Custom Product: If at the end of the contract period the full quantity has not been released and shipped, a charge will be assessed to cover the cost of any unique material plus an adjustment of discount on the entire order.

Order Reschedules: A 20% reschedule fee will be incurred unless a formal change order is received at least thirty (30) days prior to scheduled shipment.

Order Expedites: Customers requesting an expedited delivery of two (2) weeks or less of the quoted standard lead time will be subject to a charge equal to 20% of the amount being expedited.

Order Cancellations:

Standard Product - A 20% cancellation fee will be incurred unless a formal change order is received at least thirty (30) days prior to scheduled shipment.

Custom Product - Cancellations of custom product are subject to a 20% cancellation fee plus the cost of all work in process and the cost of any material unique to that order.

Product Returns

Standard Product: All returns of standard product are subject to prior approval from Parker Precision Fluidics and will incur a restocking charge of 20%. Credit will be issued based upon original invoice value. No material will be accepted for return without prior authorization from Parker Precision Fluidics. The Return Material Authorization (RMA) number should appear on all packages and accompanying paperwork.

Custom Product: Return of custom product cannot be accepted.

Warranties

Parker Precision Fluidics warrants its products against defective materials and workmanship under normal use for a period of one (1) year from the date of shipment to our customer. This warranty does not apply to any product that has been subjected to misuse, accident, improper installation, improper application, or improper operation, nor does it apply to any product that has been repaired or altered by other than an authorized factory representative. There are no warranties that extend beyond those herein specifically given.

Warranty Repair: All products will be repaired at the factory or replaced at no charge throughout the warranty period. The balance of the warranty will remain in effect and no other warranty will be issued.

Non-Warranty Repair Charges: Non-warranty repairs are not available.

IOTA One Solenoid Valve Controllers and Picospritzer III Pressure Injection Systems manufactured more than five (5) years prior to the request date will not be accepted for repair. For a fee of \$250.00, an evaluation will be performed on non-warranty units less than five (5) years old and a quote will be prepared detailing the cost of the repairs.

Return Materials Authorizations

Hazardous Material: All products returned must be free of hazardous materials. Return of any product exposed to bio hazardous material will not be accepted.

You must obtain a Return Material Authorization (RMA) number from Parker Precision Fluidics in order that we may process your returned equipment. Material will not be accepted unless an RMA number is assigned and is clearly marked on all incoming packages and associated paperwork. RMA numbers expire 60 days after date of issue. Items returned without authorization or after 60 days of issuance will be returned to the customer freight collect.

This policy has been set for our mutual protection in that it greatly reduces the possibility of misplaced returns. Please call our Customer Service Department at 1-800-525-2857 to obtain an RMA number. Be prepared to provide the following information when calling:

Customer Name, Address & Phone Number

Contact Name

Ship-To and Bill-To Address

Reason for Return & Failure Symptoms if Applicable

Part Number, Quantity & Date Code

*Purchase Order Numbers (*Note: A Purchase Order Number is necessary for products returned under warranty. P.O. number to be used as tracking vehicle only)

Precision Fluidics Division will contact the customer with date of return shipment.

Shipping: Products that are shipped to the factory for Warranty repair will be shipped at the customer's expense and will be returned to the customer at no charge via Precision Fluidics Division's standard shipping method. Products that are shipped to the factory on a freight collect basis will not be accepted. Customers may specify preferred method of shipment. Product will then be shipped back to the customer on a freight-collect basis.

Parker Hannifin Corp., Precision Fluidics Division 10/7/08



WARNING

FAILURE OR IMPROPER SELECTION OR IMPROPER USE OF THE PRODUCTS AND/OR SYSTEMS DESCRIBED HEREIN OR RELATED ITEMS CAN CAUSE DEATH, PERSONAL INJURY, AND PROPERTY DAMAGE.

This document and other information from Parker Hannifin Corporation, its subsidiaries and authorized distributors provide product and/or system options for further investigation by users having technical expertise. It is important that you analyze all aspects of your application and review the information concerning the product or system in the current product catalog. Due to the variety of operating conditions and applications for these products or systems, the user, through its own analysis and testing, is solely responsible for making the final selection of the products and systems and assuring that all performance, safety, and warning requirements of the application are met.

The products described herein, including without limitation, product features, specifications, designs, availability and pricing, are subject to change by Parker Hannifin Corporation and its subsidiaries at any time without notice.



Parker Hannifin Corporation
Precision Fluidics Division
26 Clinton Dr., Unit 103
Hollis, NH 03049
phone 603 595 1500
fax 603 595 8080
www.parker.com/precisionfluidics