

Product Enhancements

Product Bulletin

Turbine Series Bracket Change

Racor currently offers two different bracket styles for our 500FG Turbine Series and 500MA Marine Turbine Series fuel filter/water separator assemblies: a one-piece die-cast aluminum bracket and a three-piece steel bracket. These brackets styles will be phased out over the next several months and replaced with our new one-piece steel bracket. Replacement kits for current bracket styles will be available for a limited time; part numbers are RK15090 (one-piece) and RK15300 (three-piece).

New Bracket Features:

- Simple and robust steel strap.
- Uses a single carriage bolt for installation.
- Lighter and easier to install than current styles.
- Mounting flexibility – full 360° rotation available during installation to line up fuel ports and attach fuel lines.
- Generous horizontal mounting slots that can accommodate mounting positions used by other brackets: from 3.60" (9.1 cm) to 5.30" (13.5 cm).
- Been in production on our 75500FGX Turbine Series and 75500MAX Marine Turbine Series assemblies since 1993.
- Integral part of our Underwriter Laboratories (UL) listed marine assemblies.

See other side of this bulletin for additional mounting information.

Bulletin Number 7593 17 April 2003




500FG



500MA



New One-Piece Bracket
(RK 15378)

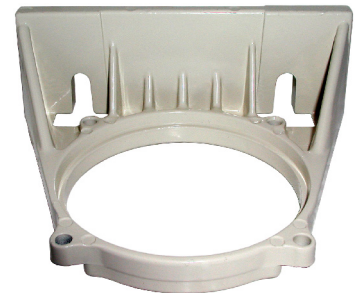

Current One-Piece Bracket
(RK 15090)




Current Three-Piece Bracket
(RK 15300)


Visit our website at www.parker.com/racor

Parker Hannifin Corporation
Racor Division
PO Box 3208
Modesto, CA 95354 USA
Phone: 800-344-3286
Fax: 209-529-3278
e-mail: racor@parker.com



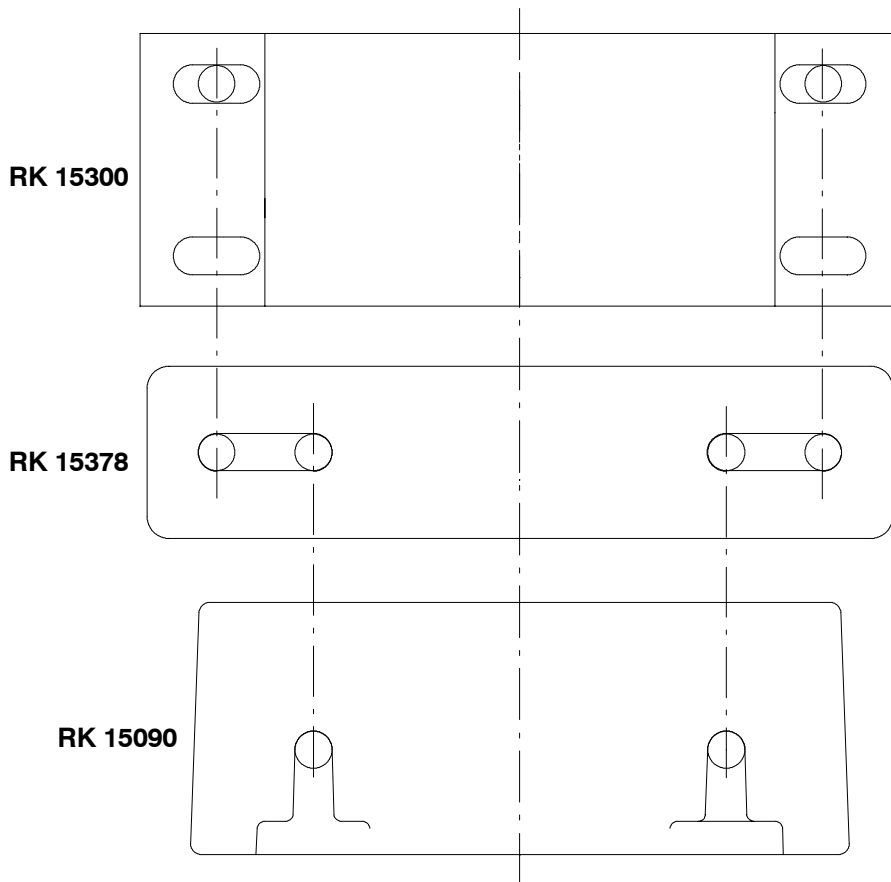

Mounting comparison with bracket centerline at the same location.

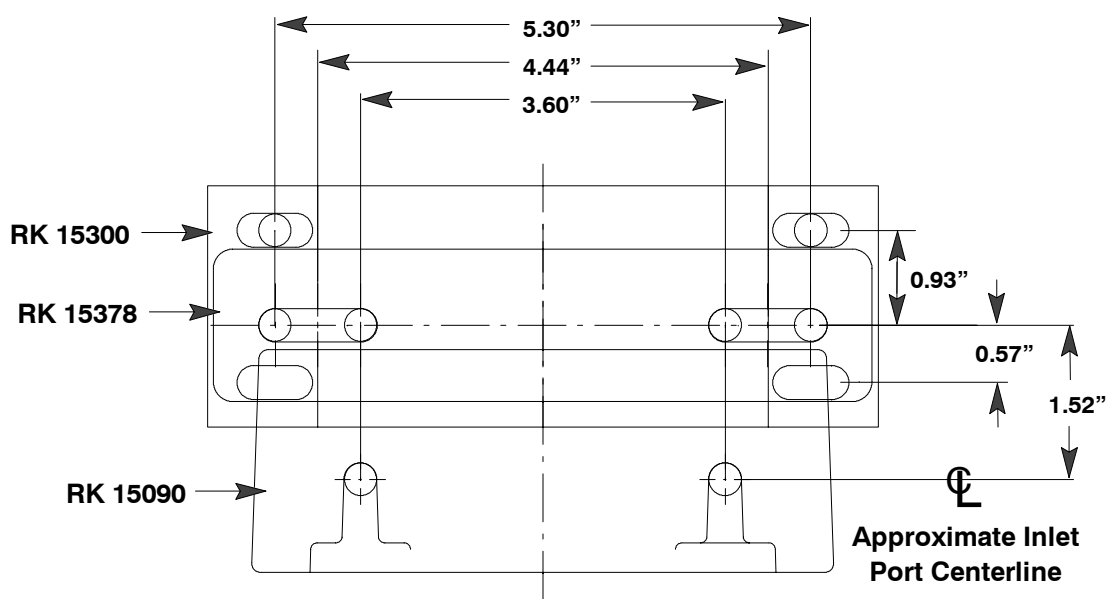

Bracket comparison with filter port centerline at the same location.