

Chelsea® 249 Series

249 Series for Ford Super Duty

Featuring the Patented
Chelsea Noise Suppression System



Overview:

Parker Chelsea makes PTO installation simpler, quieter and more cost-effective with its 249 Series PTO. The patented concept reduces torsional noise levels that are common on PTO applications for these trucks. A wide selection of pump sizes are available to provide optimum flow rates. The 249 Series also provides ease of installation through a single hose connection and an integrated cartridge valve and pressure switch helping to reduce installation time. Chelsea robust design makes the 249 the best choice for any application.

- Aerial
- Tow & Recovery
- Fire & Rescue
- Water Drilling



Contact Information:

Parker Hannifin Corporation
Chelsea Products Europe
Building 93, Vantage Point
Kingswinford, DY6 7FR
GROSSBRITANNIEN

Phone: +44 (0) 1384 282777

Fax: +44 (0) 1384 401851

chelseacustserv@parker.com

www.parker.com/chelsea


Product Features and Benefits:

- **Noise Suppression System** – Provides quiet PTO applications on Ford Super Duty Trucks. (Patent #9,494,227 B2)
- **Smart Start Available** – Shock load dampening feature to protect driven equipment.
- **Single Hose connection and Integrated Actuation Valve** – Single hose simplifies installation and reduces installation time along with eliminating leak paths.
- **Intermittent Torque Rating of 200 lbs-ft** – 58 HP @ 1200 engine RPM.
- **Pump flows up to 25.1 GPM at 1200 Engine RPM** – Standard SAE flanges and shafts allow for a wider variety of flows and pressures.
- **Simple** – PTO, pump, wiring harness and shift kits available under one part number and package.
- **Two Year Warranty** – Greater bearing capacity, larger gear width and greater clutch engagement surface provide a robust design.



ENGINEERING YOUR SUCCESS.

249 SERIES POWER TAKE-OFF SPECIFICATIONS AND TECHNICAL DATA

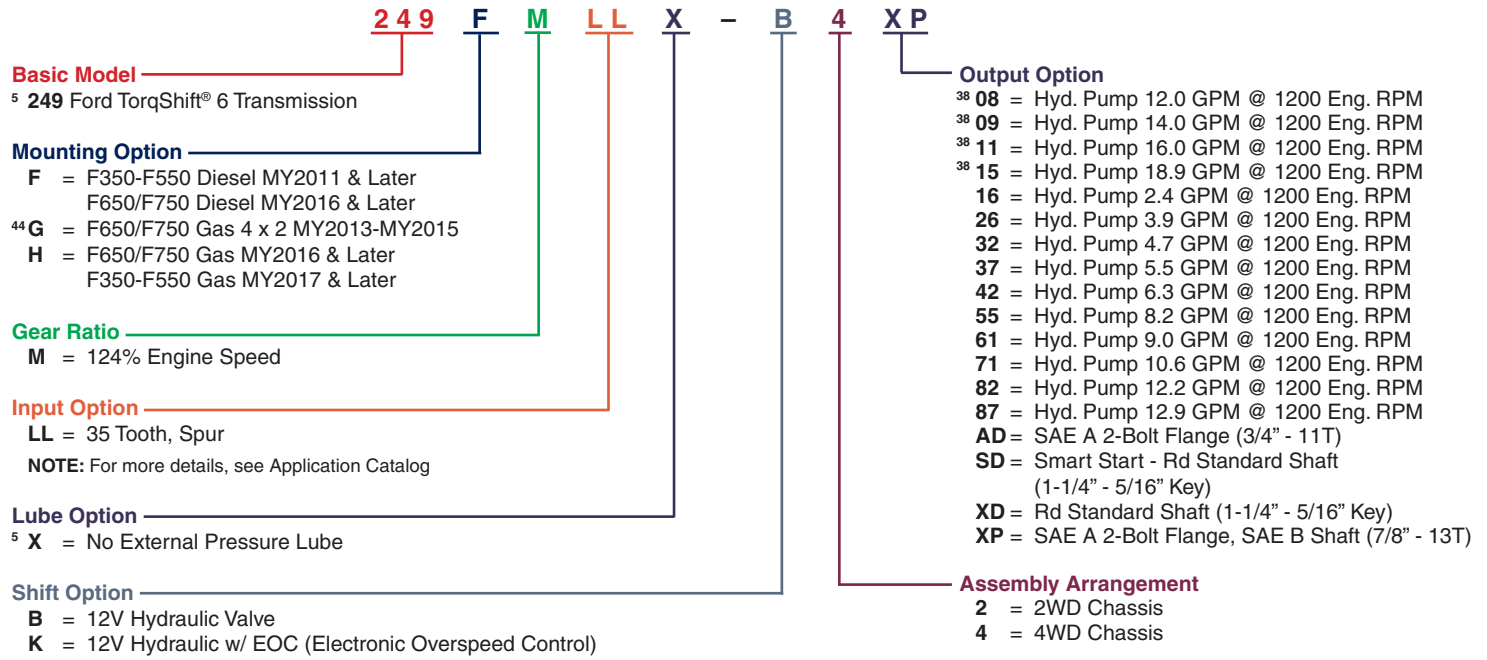

⁵ Automatically pressure lubed
³⁸ 4 x 2 Vehicles Only
⁴⁴ Includes Heat Shield and Wiring Harness
⁶³ Includes Wiring harness with high temperature loom and heat shield

Chelsea CGP-P11 Series Pump Specs for 4 x 2 and 4 x 4 Vehicles (3/4" - 11T Pump Spline) (Use AD Output Option)

Order Code w/ PTO (C)	Chelsea Pump Model	Displacement in ³ /rev	GPM (A)	Pump (A) HP	Torque (A) ft-lbs	Pressure PSI		Max Speed RPM		Max Pump Flow GPM
						Intermittent	Continuous	Pump	Engine (B)	
16	CGP-P11A016-5GC	0.37	2.15	4.5	16.0	3990	3625	4000	3226	6.41
26	CGP-P11A026-5GC	0.61	3.54	7.5	26.4	3990	3625	3600	2903	9.51
32	CGP-P11A032-5GC	0.73	4.23	9.0	31.6	3990	3625	3500	2823	11.06
37	CGP-P11A037-5GC	0.85	4.93	10.4	36.8	3990	3625	3300	2661	12.14
42	CGP-P11A042-5GC	0.98	5.68	12.0	42.4	3990	3625	3000	2419	12.73
55	CGP-P11A055-5GC	1.28	7.42	14.8	52.1	3480	3410	2800	2258	15.52
61	CGP-P11A061-5GE	1.40	8.12	15.5	54.6	3410	3265	2800	2258	16.97
71	CGP-P11A071-5GE	1.65	9.57	15.4	54.3	2900	2755	2400	1935	17.14
82	CGP-P11A082-5GE	1.89	10.96	15.3	54.0	2465	2395	2300	1855	18.82
87	CGP-P11A087-5GE	2.01	11.65	15.3	54.0	2320	2250	2000	1613	17.40

Chelsea PGP-315 Series Pump Specs for 4 x 2 Vehicles Only (3/4" - 11T Pump Spline) (Use AD Output Option)

Order Code w/ PTO	Chelsea Pump Model	Displacement in ³ /rev	GPM (A)	Pump (A) HP	Torque (A) ft-lbs	Pressure PSI		Max Speed RPM		Max Pump Flow GPM
						Intermittent	Continuous	Pump	Engine (B)	
08	CGP-P31B081-5AG	1.86	10.78	20.8	73.3	3300	3300	3000	2419	24.16
09	CGP-P31B094-5AG	2.17	12.58	21.3	75.1	2900	2900	3000	2419	28.18
11	CGP-P31B107-5AG	2.48	14.38	21.0	74.0	2500	2500	3000	2419	32.21

Chelsea P16 Series Pump Specs for 4 x 2 Vehicles Only (7/8" - 13T Pump Spline) (Use XP Output Option)

Order Code w/ PTO	Chelsea Pump Model	Displacement in ³ /rev	GPM (A)	Pump (A) HP	Torque (A) ft-lbs	Pressure PSI		Max Speed RPM		Max Pump Flow GPM
						Intermittent	Continuous	Pump	Engine (B)	
15	P16-150A-2D1	2.93	16.99	29.7	104.9	3000	3000	2800	2258	35.52

(A) GPM & Pump Input HP @ 1200 Engine RPM (1488 PTO Output RPM - 124% Ratio) & Continuous Pressure with 90% efficiency rating considered.
 (B) Max Engine Speed = (Max Pump Speed) / (1.24) for PTO Ratio Increase
 (C) For Pump Codes 61, 71, 82 & 87 - 45 degree fitting are required to connect hydraulic hoses for clearance. Order Kit number 329667X
CAUTION: 249 Gear Pump Options: The PTO drive gear delivers up to 250 Lbs. ft. torque to the aftermarket PTO, and can manage the heat of 60 HP continuously. Higher horsepower can be delivered, but for shorter durations depending on the amount of power required. Ref: Ford Body Builders Manual; TorqShift Automatic Transmission.

FORMULAS:
 GPM = Cu. In. x .004329 = G/Rev x 1488 RPMs x .90 efficiency (249V = .94)
 HP = (GPM x Max PSI) / 1714
 Torque = (HP x 5252) / 1488 RPMs