

HFR900W Series

UHP Single Stage, Pressure Regulator
High Flow, Welded, Stainless Steel

aerospace
climate control
electromechanical
filtration
fluid & gas handling
hydraulics
pneumatics
process control
sealing & shielding

Value Proposition:

The HFR900W Series regulator offers precise pressure control with a high C_V for high flow applications.

The HFR900W Series regulator can be used with corrosive and non-corrosive gases and meets high flow requirements with less than 500 psig supply pressure.



Contact Information:

Parker Hannifin Corporation
Veriflo Division
250 Canal Blvd
Richmond, California 94804

phone 510 235 9590
fax 510 232 7396
veriflo.sales@parker.com

www.parker.com/veriflo
Mobile App: m.parker.com/veriflo

Product Features:

- “VeriClean”, Veriflo’s custom low sulfur high purity 316L Stainless Steel™ enhances electropolishing, welding and corrosion resistance
- Low leakage rates eliminates the back diffusion of atmospheric contamination into the system
- Designed to withstand an internal vacuum without distortion of the diaphragm or deterioration of the seat and seal
- Standard full internal electropolish







ENGINEERING YOUR SUCCESS.


HFR900W Series

Flow Curves

Additional flow curves available upon request

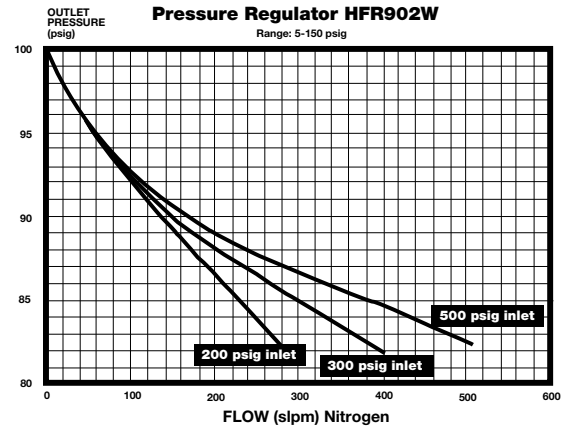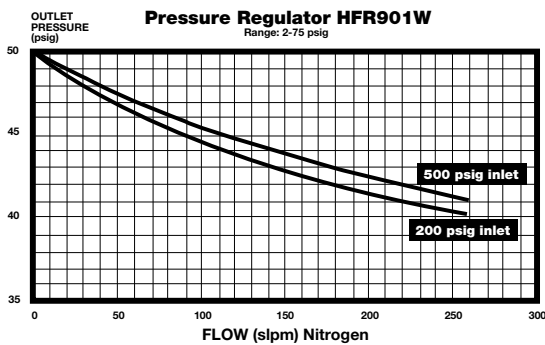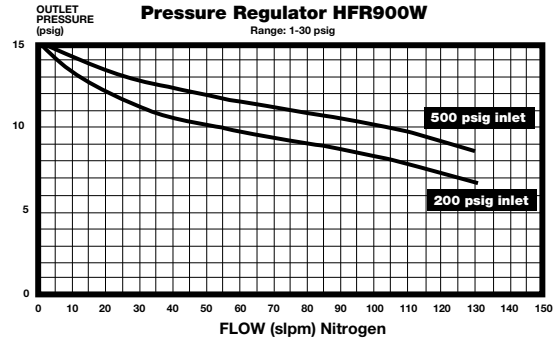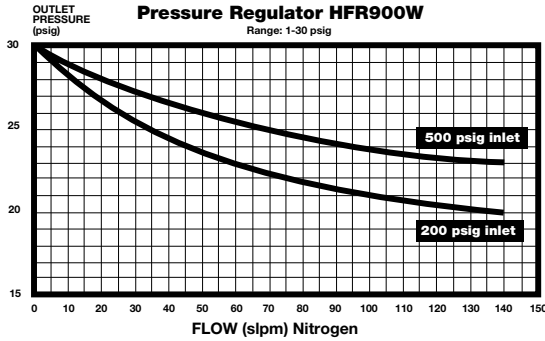

Dimensional Drawing

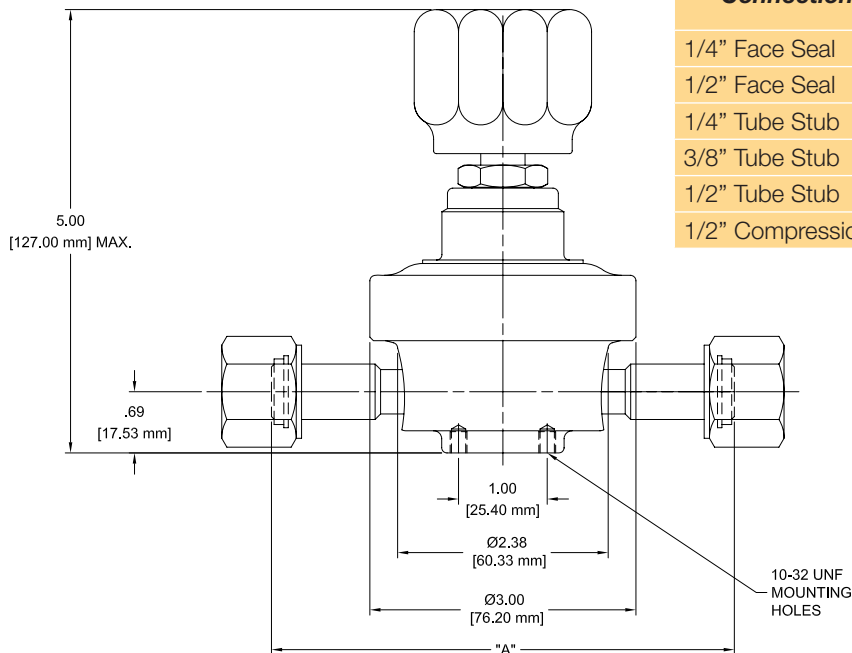

DIMENSION TABLE

Connection Type	End to End Dimension	
	"A" inches	"A" mm
1/4" Face Seal	4.30	109.00
1/2" Face Seal	5.20	133.00
1/4" Tube Stub	3.76	95.50
3/8" Tube Stub	5.00	127.00
1/2" Tube Stub	5.00	127.00
1/2" Compression Fittings	4.78	121.40

Note: $\phi 1.44$ (36.6 mm) hole required in panel for mounting.

Safety Guide and Installation and Operating Instructions available at

www.parker.com/veriflo

HFR900W Series

Ordering Information

Build a HFR900W Series regulator by replacing the numbered symbols with an option from the corresponding tables below.

Color Explanations: Black = Standard Lead Time Configurations

Blue = Extended Lead Time Configurations

For an explanation of Ordering options please reference literature 25000275 at www.parker.com/veriflo

Sample: **HFR900 W 4P 03 6 FS8 FMMF V PM**
Finished Order: **HFR900W4P036FS8FMMFVPM**

1 Basic Series
HFR900 = 1 - 30 psig
HFR901 = 2 - 75 psig
HFR902 = 5 - 150 psig

2 Body Material
W = Welded 316L Stainless Steel

3 Porting
2P = 2 Ports *No X required for gauges, Inlet & outlet ports only*
3P = 3 Ports *One X for gauge port*
4P = 4 Ports *Two X's for gauge ports*
4PB = 4 Ports *One X for gauge port*
See Regulator Porting Guide for additional options and port layouts

4 Outlet Gauge
V3 = -30 in Hg 0 - 30 psig
03 = 0 - 30 psig
01 = 0 - 100 psig
2 = 0 - 200 psig
X = No Gauge
Additional ranges available upon request

5 Inlet Gauge
4 = 0 - 400 psig
6 = 0 - 600 psig
X = No Gauge
Additional ranges available upon request

6 Port Style
FS = 1/4" Face Seal
FS8 = 1/2" Face Seal
TS = 1/4" Tube Stub
TS6 = 3/8" Tube Stub
TS8 = 1/2" Tube Stub
8T = 1/2" Compression Fittings
Compression fittings are welded and include nuts & ferrules

7 Port Configuration
M = Male
F = Female
I = Internal Face Seal
1/4" FS-M Gauge Ports are Standard

8 Seal Material
K = Perfluoroelastomer (FFKM)
200 psig max
V = Fluorocarbon (FKM)
500 psig max

9 Optional Features
This section can have multiple options
PM = Panel Mount *Captured vent not available*
R = Relief Valve *Fluorocarbon seal - 4PB Only.*

HFR900W Series

Specifications

Materials of Construction	
Wetted	
Body	VeriClean™ 316L Stainless Steel
Diaphragm	316L Stainless Steel, PTFE Lined
Nozzle Assembly	
Nozzle Body	316L Stainless Steel
Seat Options	(V) Fluorocarbon (FKM) (std) or (K) Perfluoroelastomer (FFKM)
Screen	316L Stainless Steel
Retaining Ring	15-7 PH
Gasket	PTFE
Washer	316L Stainless Steel
Spring	316 Stainless Steel
Non-wetted	
Cap	Nickel Plated Brass
Knob	ABS

For additional information on materials of construction, functional performance and operating conditions, please contact factory.

Functional Performance	
Design	
Burst Pressure	1,500 psig (103 barg)
Proof Pressure	750 psig (52 barg)
Flow Capacity	C_v 0.85
Leak Rate	
Internal	Bubble Tight
External	$< 2 \times 10^{-9}$ scc/sec He Inboard Test Method
Internal Volume	38 cc without fittings
Approx. Weight	2.5 lbs. (1.2 kg)
Operating Conditions	
Maximum Inlet	<i>(based upon seat option)</i>
Fluorocarbon	500 psig (35 barg)
Perfluoroelastomer	200 psig (14 barg)
Outlet Options	1 - 30 psig (0.06 - 2 barg) 2 - 75 psig (0.1 - 5 barg) 5 - 150 psig (0.3 - 10 barg)
Temperature	-40°F to 150°F (-40°C to 66°C)

VeriClean™ is a trademark of Parker Hannifin Corporation

OFFER OF SALE:

The items described in this document are hereby offered for sale by Parker-Hannifin Corporation, its subsidiaries or its authorized distributors. This offer and its acceptance are governed by the provisions stated in the detailed "Offer of Sale" elsewhere in this document or available at www.parker.com/veriflo



FAILURE OR IMPROPER SELECTION OR IMPROPER USE OF THE PRODUCTS DESCRIBED HEREIN OR RELATED ITEMS CAN CAUSE DEATH, PERSONAL INJURY AND PROPERTY DAMAGE. THIS DOCUMENT IS FOR REFERENCE ONLY. PLEASE CONSULT FACTORY FOR LATEST PRODUCT DRAWINGS AND SPECIFICATIONS

This document and other information from Parker-Hannifin Corporation, its subsidiaries and authorized distributors provide product or system options for further investigation by users having technical expertise.

The user, through its own analysis and testing, is solely responsible for making the final selection of the system and components and assuring that all performance, endurance, maintenance, safety and warning requirements of the application are met. The user must analyze all aspects of the application, follow applicable industry standards, and follow the information concerning the product in the current product catalog and in any other materials provided from Parker or its subsidiaries or authorized distributors.

To the extent that Parker or its subsidiaries or authorized distributors provide component or system options based upon data or specifications provided by the user, the user is responsible for determining that such data and specifications are suitable and sufficient for all applications and reasonably foreseeable uses of the components or systems.

The products described herein, including without limitation, product features, specifications, designs, availability and pricing are subject to change by Parker Hannifin Corp and its subsidiaries at any time without notice.

Proposition 65 Warning: This product contains chemicals known to the state of California to cause cancer or birth defects or other reproductive harm.

© 2009 Parker Hannifin Corporation



Use mobile device to scan this QR Code.

LitPN: 25000036

Rev: D

Date of Issue 04/2013



ENGINEERING YOUR SUCCESS.