











# **RS and AXEM Series**

DC Servo Motors







#### WARNING — USER RESPONSIBILITY

FAILURE OR IMPROPER SELECTION OR IMPROPER USE OF THE PRODUCTS DESCRIBED HEREIN OR RELATED ITEMS CAN CAUSE DEATH, PERSONAL INJURY AND PROPERTY DAMAGE.

- This document and other information from Parker-Hannifin Corporation, its subsidiaries and authorized distributors provide product or system options for further investigation by users having technical expertise.
- The user, through its own analysis and testing, is solely responsible for making the final selection of the system
  and components and assuring that all performance, endurance, maintenance, safety and warning requirements of
  the application are met. The user must analyze all aspects of the application, follow applicable industry standards,
  and follow the information concerning the product in the current product catalog and in any other materials
  provided from Parker or its subsidiaries or authorized distributors.
- To the extent that Parker or its subsidiaries or authorized distributors provide component or system options based upon data or specifications provided by the user, the user is responsible for determining that such data and specifications are suitable and sufficient for all applications and reasonably foreseeable uses of the components or systems.

### **RS and AXEM Series**

### High Performance DC Servo Motor - RS Series

Overview	4
Technical Data	5
Dimensions	6
Options	8
Order Code	9
Pancake DC Servo Motor - AXEM Series	
Overview	10
Technical Data	11
Dimensions	11

# **High Performance DC Servo Motor - RS Series**

### **Overview**

#### **Description**

Using high energy magnets, RS DC motors are particularly suitable for applications which require a very compact solution or a high dynamic level. Characteristics and advantages

- · High performance characteristics
- · Excellent low-speed functioning
- · High compactness
- · Very long service life
- · Rare earth magnets
- · Tacho and brake in option

#### **Features**

- Shaft
  - RS2 to RS4: Smooth full shaft
  - · RS5 and RS6: Full keyed shaft
- · 2nd Shaft end
  - RS2 to RS3: possibility to mount standard tacho or encoder
  - RS5 and RS6: possibility to mount standard tacho, adaptation for encoder mounting in option
- · Output cables 1 m without connector
- Options
  - · Brake (RS2 to RS6)
  - Tachometer
  - Adaptation 2<sup>nd</sup> shaft end for encoder mounting (RS5 and RS6)




#### **Technical Characteristics - Overview**

Motor type	DC motors with rare earth magnets
Number of poles	4
Protection degree	<ul><li>RS2 to RS4: IP40</li><li>RS5 and RS6: IP54</li></ul>
Insulation	Class F
Torque at low speed	0.22 13 Nm
Permanent current at low speed	4.1 28 A
Rated voltage	25.4 105 V
Rated speed	2000 3000 min <sup>-1</sup>
Rotor inertia	195 8 300 kgmm <sup>2</sup>

# **Technical Data**


Torque at low speed M <sub>0</sub> [Nm]	Permanent current at low speed I <sub>0</sub> [A]	Rated Voltage U [V]	Rated Speed N [min <sup>-1</sup> ]	Rotor Inertia [kgmm²]	Product (	Code
0.225	4.1	25.4	3000	195	RS220FR1	<ul><li>00</li><li>00</li><li>00</li></ul>
0.232	2.8	38.6	3000	195	RS220KR1	
0.31	5.6	24	3000	26	RS230CR1	
0.39	6	27.6	3000	325	RS240BR1	■ 00
0.54	4.5	49	3000	83	RS320HR1	<ul><li>00</li><li>00</li><li>00</li></ul>
0.78	5.9	51	3000	110	RS330ER1	
0.98	6.9	53	3000	140	RS340CR1	
0.48	3.6	60	3000	137	RS410RR1	<ul><li>00</li><li>00</li><li>00</li><li>00</li></ul>
0.93	6.2	60	3000	225	RS420JR1	
1.3	8.1	43	2000	310	RS430FR1	
1.36	6.6	78	3000	310	RS430HR1	
1.74	7	90	3000	400	RS440GR1	■ 00
1.9	7.9	82	2700	1 000	RS510LR1	<ul><li>00</li><li>00</li><li>00</li></ul>
3.1	10.9	92	2700	1 350	RS520GR1	
4	13	97	2700	1 700	RS530ER1	
5	15	104	2700	2 050	RS540CR1	■ 00
8	22.3	100	2400	5300	RS620GR1	■ 00
10.8	25	100	2000	6800	RS630FR1	■ 00
13	28	105	2000	8 300	RS640ER1	■ 00

## **Dimensions**

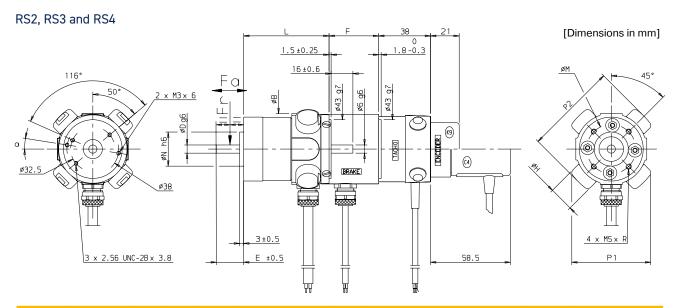

RS2, RS	RS2, RS3 and RS4 with brake, tacho and encoder dimensions														
Motor	а	N	D	E	В	L	F	P1	P2	Н	MSxR	М	Weight [kg]	Fr <sup>(1)</sup> [daN]	Fa <sup>(1)</sup> [daN]
RS220 RS230 RS240	9° 9°	25 25 25	6 6 6	20 20 20	52 52 52	79 95 111	36.4 36.4 36.4	58 58 58	68 68 68	18.5 18.5 18.5	M4x6 M4x6 M4x6	36 36 36	0.7 0.86 1	18 18 18	10 10 10
RS320 RS330 RS340	- - -	32 32 32	9 9 9	25 25 25	68 68 68	100.5 120.5 140.5	41 41 41	69 69 69	83 83 83	18.5 18.5 18.5	M5x8 M5x8 M5x8	45 45 45	1.3 1.6 2	28 28 28	15 15 15
RS410 RS420 RS430 RS440	- - -	50 50 50 50	11 11 11 11	32 32 32 32	83 83 83 83	95.5 115.5 135.5 155.5	40 40 40 40	82 82 82 82	98 98 98 98	22 22 22 22	M5x8 M5x8 M5x8 M5x8	65 65 65	1.2 1.8 2.4 3	40 40 40 40	20 20 20 20

<sup>(1)</sup>Fr and Fa not cumulative

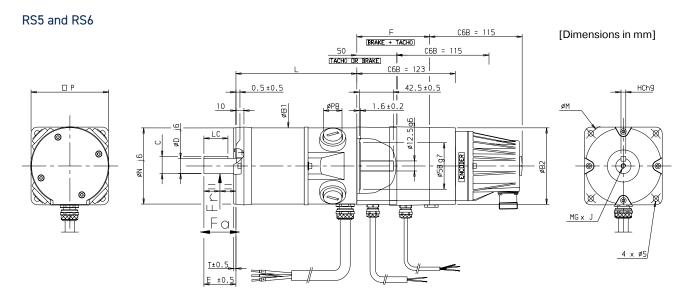

RS5 an	RS5 and RS6 with brake, tacho and encoder dimensions																		
Motor	Р	N	С	D	LC	E	т	В1	РВ	L	F	B2	S	M	MGxJ	нс	Weight [kg]	Fr <sup>(1)</sup> [daN]	Fa <sup>(1)</sup> [daN]
RS510 RS520 RS530 RS540	97	95 95 95 95	21.5 21.5 21.5 21.5	19 19 19 19	30 30 30 30	40 40 40 40	3 3 3 3	96 96 96 96	25 25 25 25	151 180 209 238	91 91 91 91	96 96 96 96	7 7 7 7	115 115 115 115	M6x18 M6x18 M6x18 M6x18	6 6 6	5.1 6.3 7.5 8.7	70 70 70 70	23 23 23 23
RS620 RS630 RS640	120	110 110 110	27 27 27	24 24 24	40 40 40	50	3.5 3.5 3.5	117 117 117	30 30 30	246 284 321	93 93 93	117 117 117	10 10 10	130 130 130	M8x20 M8x20 M8x20	8 8 8	11.5 14 16.3	80 80 80	26 26 26

<sup>(1)</sup> Fr and Fa not cumulative

# **Options**

Tachometers and brakes								
Motors	Tac	chometer	Brakes [Voltage 24 VDC +/- 10 %]					
Wiotors	Model	EMF	Holding	torque [Nm]	Inertia	Weight		
	Model	[V/1000 min <sup>-1</sup> ]	20 °C	100 °C	[kgmm²]	[kg]		
RS2	TBN 206	6	0.6	0.55	2	0.2		
RS3	TBN 206	6	1.5	1.4	10	0.18		
RS4	TBN 206	6	1.5	1.4	10	0.18		
RS5	TBN 306	6	6	5.5	53	0.45		
RS6	TBN 306	6	12	11.5	157	0.9		

Encoders					
Model	Associated motors	Pulse per rev	Encoder reference	Mounting kit reference	Connector reference
C2	RS2 / RS3 / RS4 RS2 / RS3 / RS4	500 1000	220215P0001 220215P0004	220071R0025 220071R0025	

Other encoders: on request

## **Order Code**

### **RS Series**

	1	2	3	4	5	6	7
Order example	RS	220	F	R	1	0	11

1	Motor type	•				
	RS	Motor with neodyme magnets				
2	<b>Motor size</b>	and length				
	220 230 320 	see table "Technical data"				
3	Winding					
	F L H 	Depend of motor size, speed and voltage/current, see table "Technical data"				
4	Fix code					
	R					
5	Mechanical features					
	1 Output cables (standard)					
6	<b>Options</b>					
	0	No accessories (standard)				
	1	Tacho				
	2	Brake (RS2 to RS6)				
	3	Tacho + brake (RS2 to RS6)				
	4	Encoder adaptation (1) (size 5 and 6 only)				
	5	Tacho + Encoder adaptation (size 5 and 6 only)				
	6	Brake + Encoder adaptation (size 5 and 6 only)				
	7	Tacho + Brake + Encoder adaptation (size 5 and 6 only)				
7	Customer	specification				
	00	Standard catalogue definition - smooth shaft (size 1 -> 4) - shaft with key way (size 5-6)				

<sup>&</sup>lt;sup>(1)</sup> Encoder adaptation is standard for RS2, RS3 and RS4.

## Pancake DC Servo Motor - AXEM Series

### **Overview**

#### **Description**

The AXEM motor, with more than 2 million units produced, is one of the most widespread servo motors in the world. With its disk rotor, composed solely of copper and insulator the Axem motor achieves high dynamics and excellent regulation of motion at low speed, as well as silent and vibration-free functioning.

It is robust, efficient, and low maintenance.

### **Advantages**

- · Very low speed modulation
- · Exceptional regulation at low speed
- High dynamic characteristics low rotor inertia
- · Silent and vibration-free functioning
- Maintenance free
- · Disk rotor
- Protection: IP44Class F insulation

#### **Applications**

- Factory Automation
- Life Science Diagnostic



#### **Technical Characteristics - Overview**

Nominal torque	0.1419.2 Nm
Nominal current	6.444 A
Nominal voltage	14178 V
Nominal speed	3000, 4800 min <sup>-1</sup>
Inertia	297400 kgmm <sup>2</sup>



## **Technical Data**

Motor	Nominal torque [Nm]	Nominal current [A]	Nominal voltage [V]	Nominal speed [min <sup>-1</sup> ]	Inertia [kgmm²]
F9M4R	0.14	6.4	22	4800	35
F9M2	0.282	11	14	3000	29
F9M4	0.346	6.7	26	3000	35
F9M4H	0.537	6.5	35	3000	34
MC19P	3.2	14.5	83	3000	1000
MC19S	3.2	7.3	165	3000	1000
MC24P	7.3	18.9	136	3000	3200
MC27P	14.3	33	152	3000	7400

Tachy								
Туре	Associated motor	EMF [V/1000 min <sup>-1</sup> ]						
F9T	F9	3						
FC12T	MC	6						
TBN 206	F9	6						
TBN 420	MC	20						

## **Dimensions**

F9 dimensions					
Motor	L1 [mm]	L2 [mm]	Weight [kg]	Fr <sup>(1)</sup> [daN]	Fa <sup>(1)</sup> [daN]
F9M4R	34	46.5	1.1	14	2.5
F9M2	52.5	65	2.3	14	2.5
F9M4	52.5	65	2.3	14	2.5
F9M4H	64	76.5	2.8	14	2.5


F9: øB = ø110

2560	LI MAX		•	achy 21 Encod	040 040	4 <u>x M5</u>
32	L2 MAX	40	38	59		




MC19 dimensions					
Motor	Weight [kg]	Fr <sup>(1)</sup> [daN]	Fa <sup>(1)</sup> [daN]		
MC19	9.7	60	35		

<sup>(1)</sup> Fr and Fa not cumulative



MC24 - MC27 dimensions					
Motor	Weight [kg]	Fr <sup>(1)</sup> [daN]	Fa <sup>(1)</sup> [daN]		
MC24	23	80	45		
MC27	35	90	50		

<sup>(1)</sup> Fr and Fa not cumulative



192-124400 02/2024 www.parker.com



European Headquarters La Tuilière 6, 1163 Etoy, Switzerland Tel: +41 21 821 85 00

Dean Headquarters

Your authorized distributor