



Pneumatic Division
Richland, Michigan 49083




WCS-SIF-01

Training & Maintenance Manual

ISSUED: June, 2006

Supersedes: December, 2005

Pneumatic Spotwelding Control Systems Training & Maintenance Manual

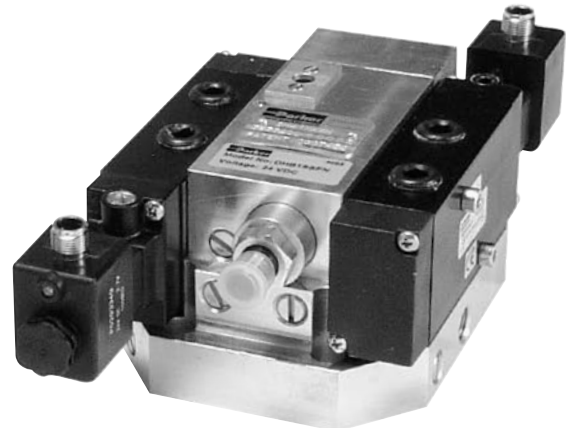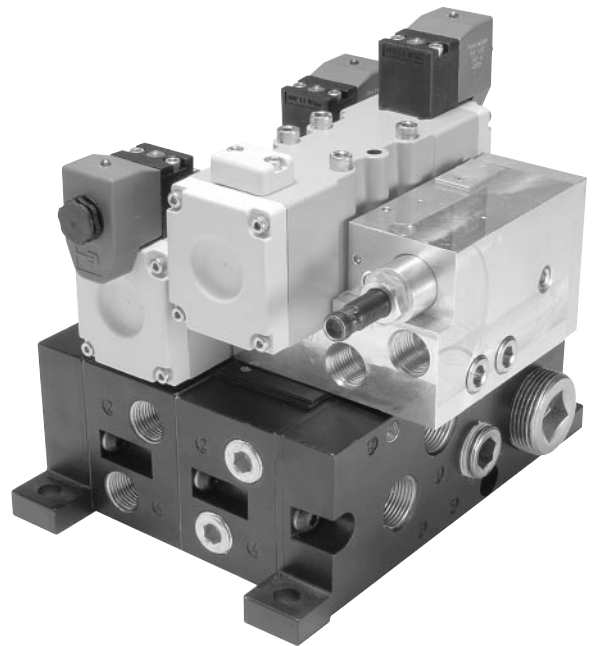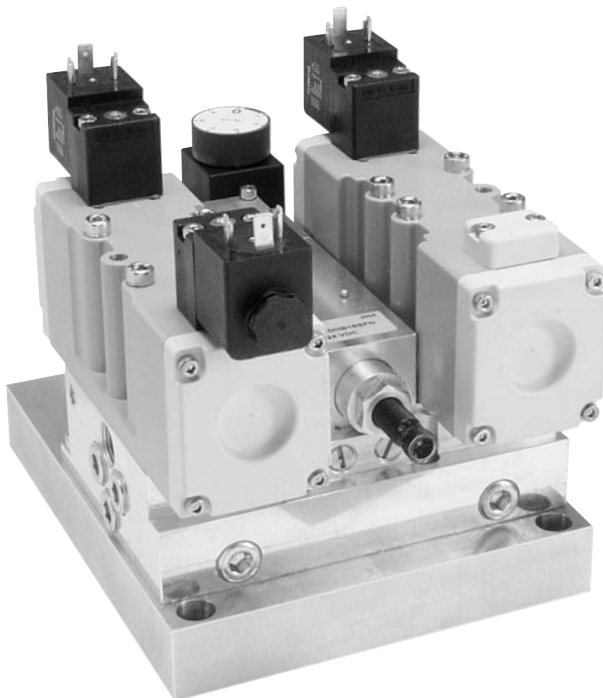

General Description of Spotwelding Units


The spotwelding system is an integrated pneumatic controlled circuit that is specifically designed to increase production throughput, while improving weld quality and reducing decibel noise level.

Each unit consists of 2 independent, 2 position, directional control valves for retract (pre-stroke) and weld stroke. Each valve is dual pressure, with single solenoid / spring assist return or double solenoid available. Also included with each unit is a proportional / quick dump valve, a feedback sensor for initiating the welding process, and a flow control for metering the impact speed of the weld tips.


ANSI (3 Ported Cylinder Option)

Inductive Sensor / Connection: Turck Connection Diagram Inductive Sensor


- | | |
|---------|----------------------|
| 1 Brown | +24 VDC Power Supply |
| 3 Blue | 0 V Power Supply |
| 4 Black | Switch Wire |

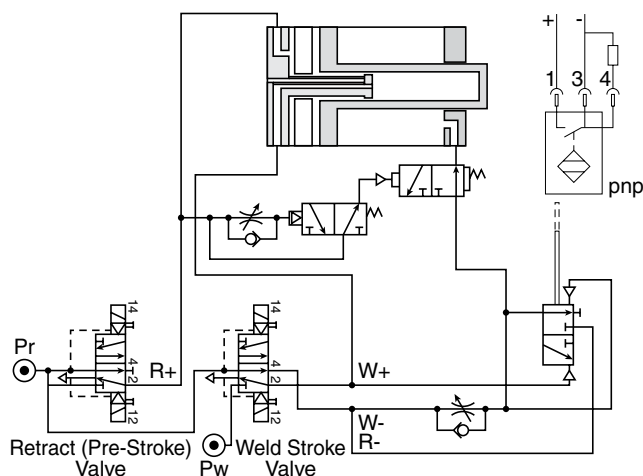

Front View

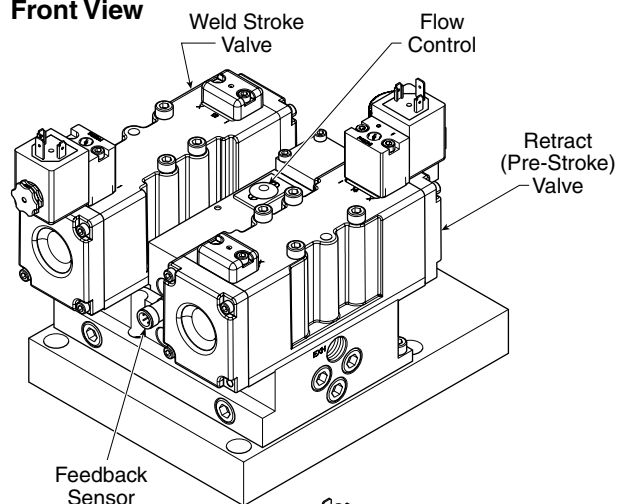

Back View

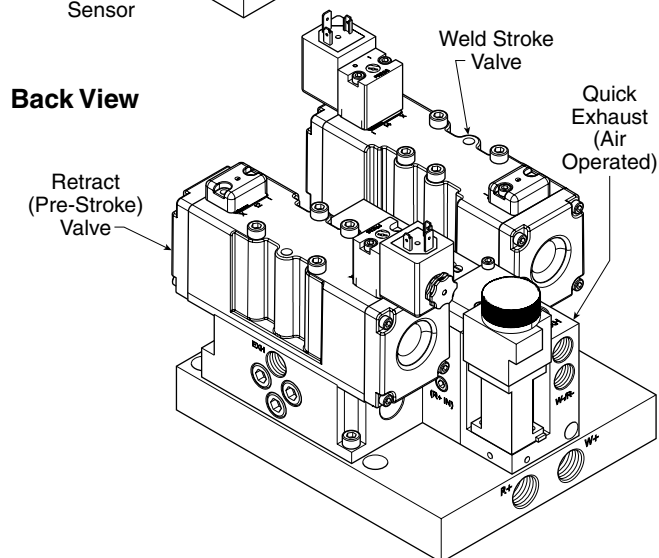

General Operation of Spotwelding Units – 3 ported guns

Spotwelding systems control both retract (pre-stroke) and weld stroke motions. When a 3 ported cylinder is used, the control block functions as follows:

1. The pre-stroke (retract) valve is energized, allowing the weld cylinder to extend under full line pressure by actuating the quick exhaust valve and moving to its predetermined position prior to welding.
2. The quick exhaust valve time is adjusted by the knob on top of the unit. To start, the white line on the dial is set at top dead center. Turn knob clockwise to set quick exhaust valve open time. Continuing to turn knob clockwise will lengthen time until it reaches a full 360° rotation, which covers the complete timing range.
3. The weld stroke valve is then energized using a selected weld schedule pressure. The closure speed of the weld tips is controlled by the use of an adjustable flow control, thus creating "low impact".
4. Immediately following weld tip contact with the sheet metal, two actions take place.

- a. The proportional / quick dump valve that senses pressure allows the front end of the cylinder to exhaust (by-passing the flow control), providing weld schedule pressure instantly.
 - b. The proportional / quick dump valve also actuates a feedback sensor to start the weld cycle.
5. Once the weld cycle is complete, the weld stroke valve is de-energized, allowing the weld tips to open under full pressure.
 6. The retract (pre-stroke) valve is then de-energized, allowing the weld cylinder to open completely under full line pressure.

Note: Dual pressure is provided to the control block. Line (high) pressure is used for both retract stroke and weld stroke open. Weld schedule pressure is used for weld stroke close. Dual pressure provides for weld tips to be closed for tip dressing using any pressures available, from as low as 5 PSIG to maximum line pressure.


Description & Operation

General Operation of Spotwelding Units – 2 and 4 ported guns


Spotwelding systems control both retract (pre-stroke) and weld stroke motions. When a 4 ported cylinder is used, the control block functions as follows:

1. The retract (pre-stroke) valve is energized, allowing the weld cylinder to extend under full line pressure and moving to its predetermined position prior to welding.
2. The weld stroke valve is then energized using a selected weld schedule pressure. The closure speed of the weld tips is controlled by the use of an adjustable flow control, thus creating "low impact".
3. Immediately following weld tip contact with the sheet metal, two actions take place.
 - a. The proportional / quick dump valve that senses pressure allows the front end of the cylinder to exhaust (by-passing the flow control), providing weld schedule pressure instantly.
 - b. The proportional / quick dump valve also actuates a feedback sensor to start the weld cycle.
4. Once the weld cycle is complete, the weld stroke valve is de-energized, allowing the weld tips to open under full pressure.
5. The retract (pre-stroke) valve is then de-energized, allowing the weld cylinder to open completely under full line pressure.

Note: Dual pressure is provided to the control block. Line (high) pressure is used for both retract stroke and weld stroke open. Weld schedule pressure is used for weld stroke close. Dual pressure provides for weld tips to be closed for tip dressing using any pressures available, from as low as 5 PSIG to maximum line pressure. 2 ported guns perform the same steps as above, except that the retract (pre-stroke) portion of the cylinder does not exist. Steps 2–4 only apply.

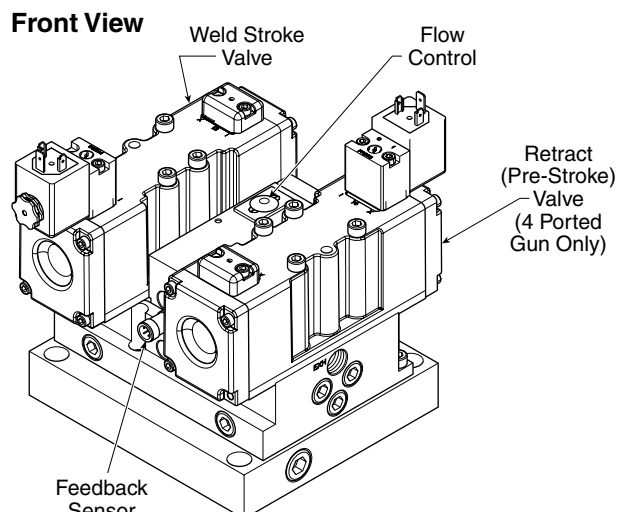


Back View

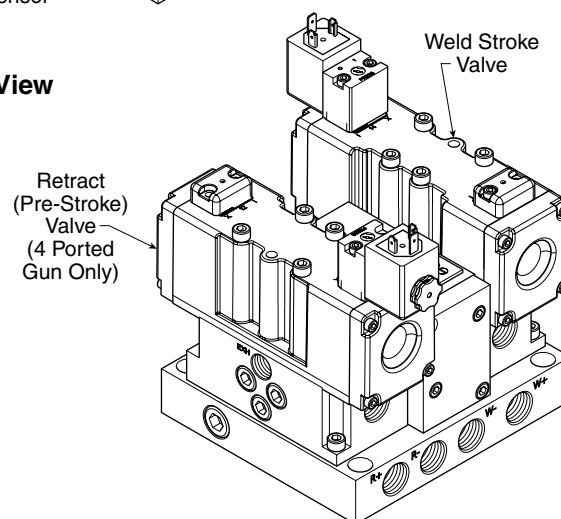

ANSI (2 Ported Cylinder Option)

Inductive Sensor / Connection: Turck Connection Diagram Inductive Sensor


- | | |
|---------|----------------------|
| 1 Brown | +24 VDC Power Supply |
| 3 Blue | 0 V Power Supply |
| 4 Black | Switch Wire |

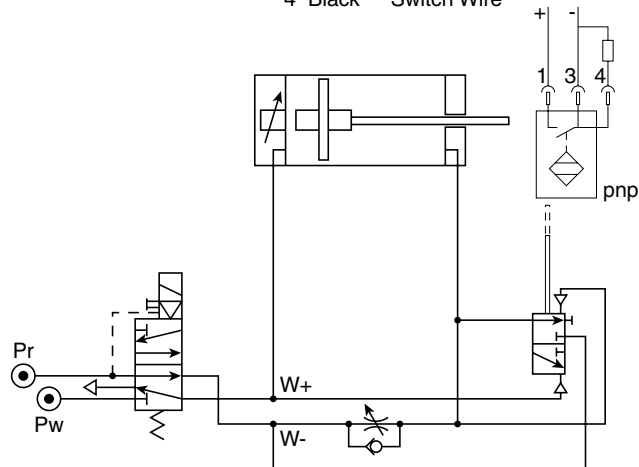

ANSI (4 Ported Cylinder Option)

Inductive Sensor / Connection: Turck Connection Diagram Inductive Sensor

- | | |
|---------|----------------------|
| 1 Brown | +24 VDC Power Supply |
| 3 Blue | 0 V Power Supply |
| 4 Black | Switch Wire |

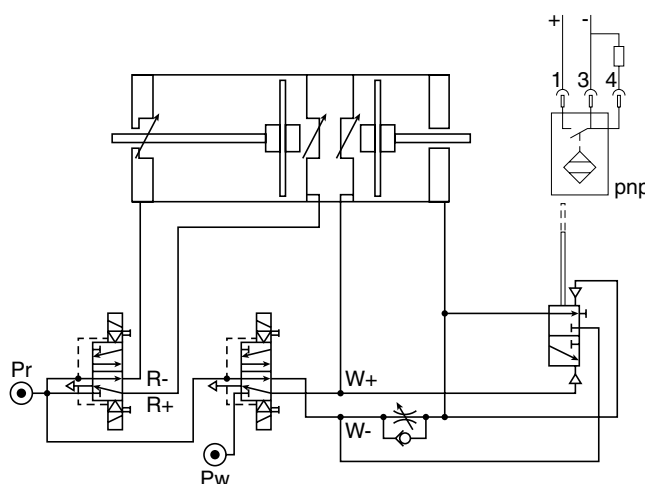

Installation – Air and Electrical

A. Installing Weld Block with Existing Equipment

1. Shut off air supply to weld gun and turn power off to cell.
2. Disconnect air hoses from existing weld block ports. This will vary depending on weld gun type, and whether the existing weld block is single or dual pressure.
Note: If the current weld block is mounted directly to the cylinder, then only the inlet port hoses will be disconnected.
3. Disconnect solenoid connectors from valves. Be sure to note which connectors are being used for pre-stroke (retract) valves and weld stroke valves.
4. Remove current weld block from gun.

B. Installing Weld Block on New Equipment

5. Mount weld block spotwelding system to robot using (4) M8 screws and torque to 130 to 145 in. lbs (14.7 to 16.4 Nm).
6. Connect all air hoses to weld block (see schematic on pages 2 or 3).

Note: An additional air hose may be necessary for the inlet, since this unit is dual pressure. If so, connect the already existing hose to the Pw port (pressure weld). This hose should be supplying scheduled pressures from a proportional regulator. Connect the additional hose before the proportional regulator using a T-fitting so that full line pressure is being used. This hose should be connected to the Pr port (pressure retract).

7. Connect the solenoid cables to the proper valves. Connect an M12 sensor cable to the feedback sensor on the unit. The other end of this cable should be wired to the PLC controller.

8. Turn air supply and power on.


9. Check for air leaks. The weld cylinder should be in the home position (completely open). If not, check that all air hoses are connected to the correct ports. Verify that all solenoids are de-energized, and valve overrides are unactuated. Once this is done, verify the function of the weld block, by actuating the weld block valves using the manual overrides. Press and hold the retract (pre-stroke) valve manual override. The weld cylinder should move to the weld stroke position. Press and hold the weld stroke valve manual override [still holding the retract (pre-stroke) override]. The weld cylinder should now close. Release the weld stroke override and the retract (pre-stroke) override. The weld cylinder will return to home position.

Note: The weld stroke portion of the cylinder will move slower than the pre-stroke. This is due to the regulated pressure being used, as well as the flow control. Adjusting the speed of the cylinder will be covered in the Setup Instructions. Repeat this process, now energizing the solenoids. The cylinder should perform the same. If not, verify that the solenoid connectors are located on the proper valves. Once the unit has been properly installed, the following setup procedure can be used to ensure that the Parker weld system is used to its fullest potential.


Wiring

Refer to valve Instruction Sheet for proper wiring connections. Available at: www.parker.com/pneumatic (see B6 and ISO size 2 valves Installation and Service Instructions).

3 Ported Installation

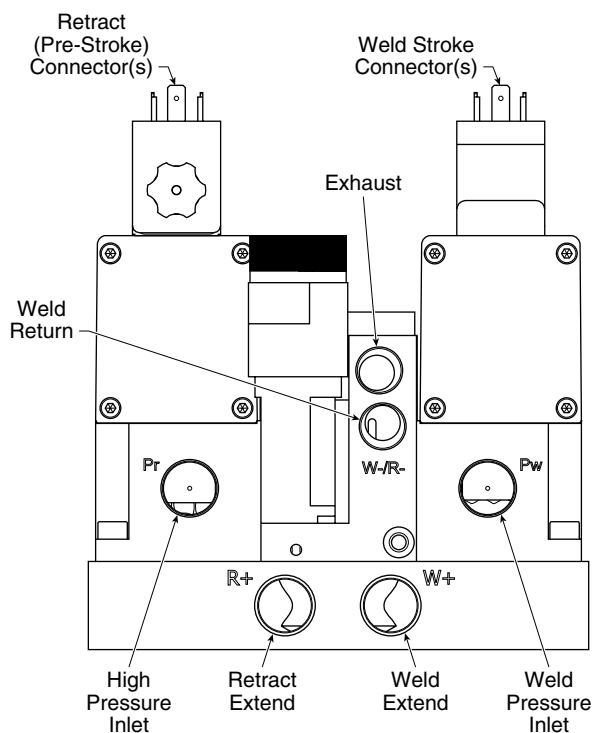

4 Ported Installation

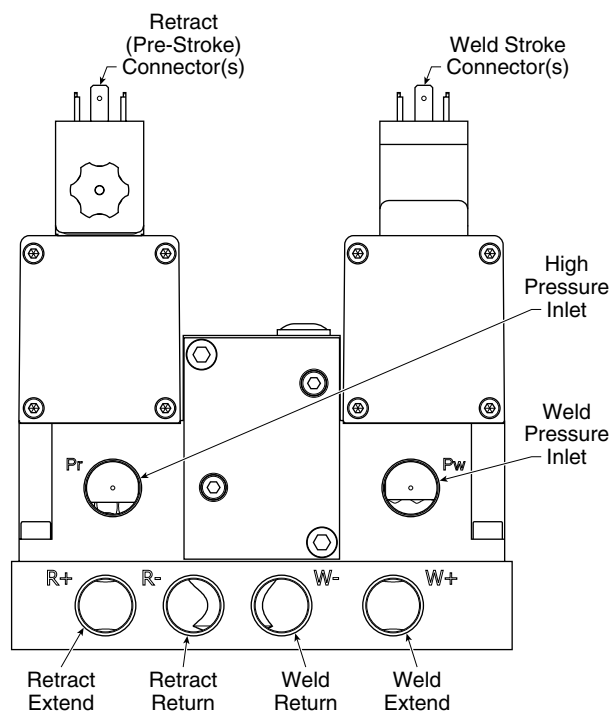

Setup

Below are the step by step setup procedures for properly setting the flow control and feedback sensor.

How to Set the Flow Control Properly

Begin by turning the flow control clockwise until it stops. If this is done properly, then the weld stroke should move extremely slow or not at all.

Note: As stated in the Installation procedure, the pre-stroke valve must be actuated prior to the weld stroke valve in order for the weld cylinder to move correctly.


Slowly (1/4 to 1/2 turn at a time) begin to open the flow control by turning counterclockwise. The weld tips should now close upon actuation of the valves. At this point, you should begin to hear a second exhaust coming from the weld unit once the weld tips have made contact. This second exhaust is the air from the front side of the cylinder bypassing the flow control. As you continue to speed up the weld stroke by turning the flow control, the delay between the tips closing and the second exhaust will get shorter. Also, check the feedback sensor while this is occurring. The indicator light from the sensor should illuminate when you hear the second exhaust. This is the key to determining the proper setting of the flow control. The optimum setting for each weld block will be different for each gun, based on the bore size and weld stroke used. Continue to open the flow control, allowing the weld tips to close faster until:

1. You have reached an impact speed you are happy with.
2. You have reached an acceptable decibel noise level.
3. You see that the second exhaust and feedback sensor illumination occur "just" as the weld tips contact.


Note: This is a judgement call. If the flow control is set too far open, then the weld block could result in welding misfire causing the gun to fire before the weld tips close fully. The reason this would occur is because the flow control has been opened so much that all the air on the front side of the cylinder has exhausted before the tips fully close, thus negating the "low impact" benefit of the system. To guarantee proper performance, find the setting where the exhaust / illumination occurs "just" as the tips close, and then adjust the flow control 1/2 turn clockwise.

How to Set the Feedback Sensor Properly

The purpose of the feedback sensor is to provide an input signal at the exact moment that full weld pressure has been obtained at the weld tips. Traditionally this is achieved using squeeze time. An experienced weld / electrical engineer is needed to place the feedback sensor input into the PLC program. The location of this input will vary depending on the PLC manufacturer. Consult the robot manufacturer for the proper input location.

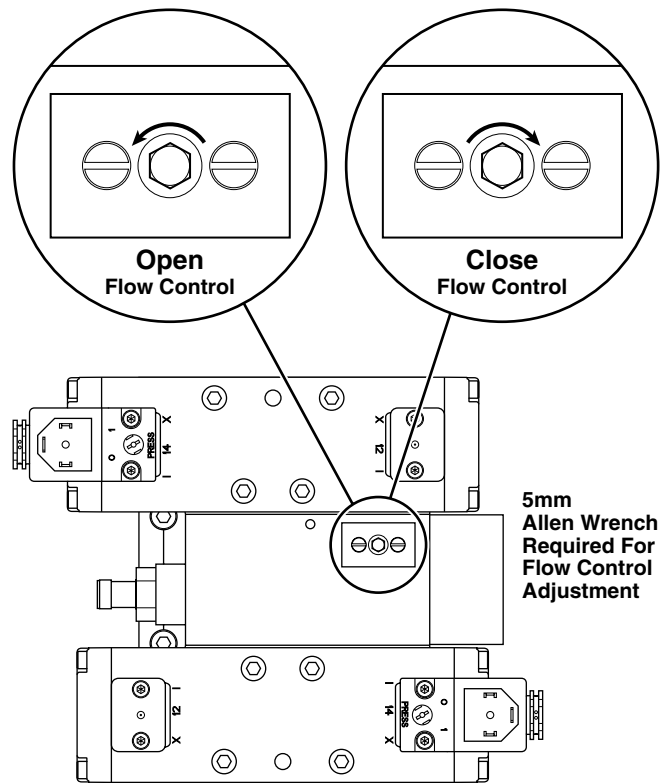

Electrical Changes (Sample):

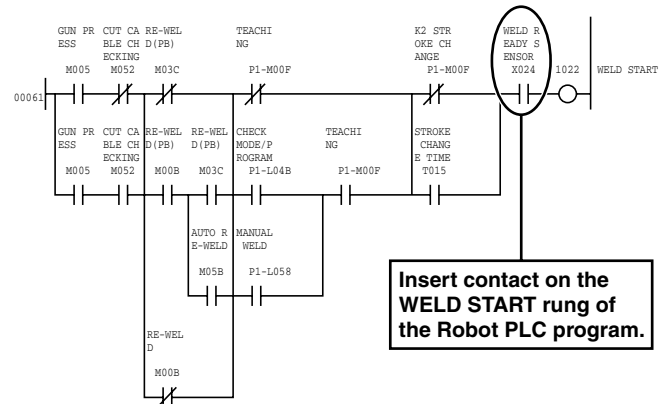

Above is a sample PLC program where the feedback sensor was placed during a typical install. The location of the input should be right before the weld start command. Once the input has been placed into the program, disconnect the sensor cable from the feedback sensor. This will allow you to determine whether or not the input was placed in the correct spot.

Perform a trial run. If on the first weld, the weld tips close and the robot stops, then the sensor input has been located correctly in the program. If the robot continues to run, despite the cable being disconnected, then the sensor input is not correct. Review the location and then try the trial run again.

Note: The weld block should perform the same whether the robot is in manual or automatic mode.

Pneumatic System with Low Impact and Rapid Approach Control



Description

Pneumatic valve block for use with pneumatic weld gun cylinders. The block has an integrated low impact system and is provided with two solenoid operated "Namur" or ISO size 2 valves. One valve for the retract (pre-stroke) and one for the weld stroke. The valves can be of the single solenoid type or the double solenoid type. The block is available for different constructions of cylinders:

- DH / WH = 3 Ported Cylinders
- DP / WP = 2 and 4 Ported Cylinders

Ordering Code: See pages 7 – 13.

Dimensions: See pages 15 – 18.

Applications

The Spotwelding System can be used with any Pneumatic Spot Weld Cylinder.

Mounting

The weld block can either be mounted on the side of the robot or directly to the cylinder. See pages 10 – 12 for bolt hole patterns for robot mount. Consult Parker for cylinder mount application.

Technical Data

Medium..... Compressed air, filtered to 40µ and dried to a dewpoint of 37°F (3°C), lubricated or non-lubricated. Once lubricated air is applied, this must be maintained.

Working Pressure37 to 145 PSIG (2.5 to 10 bar)

WH Series Air Operated

Quick Exhaust40 to 115 PSIG (2.7 to 7.9 bar)

Ambient Temperature 41°F to 120°F (5°C to 49°C)

Weight –

DP 12.0 lbs (5.4 kgs)

DH 7.0 lbs (3.2 kgs)

WP (with Baseplate) 14.0 lbs (6.4 kgs)

WH (with Baseplate) 18.0 lbs (8.2 kgs)

Pneumatic Valve

24 VDC

Operating Voltage Solenoids 24 VDC +10/-15%

Power Consumption.....4.8W

Class of Protection..... IP65 (with plug mounted)

Connector M12, 22mm, 30mm, Auto (ISO 2 only)

120 VAC

Operating Voltage Solenoids ...120 VAC +10/-15%

Frequency50 / 60 Hz

Power Consumption..... 7.8 VA / 6.3 VA

Class of Protection..... IP65 (with plug mounted)

Connector M12, 22mm, 30mm, Auto (WP / WH only)

Proximity Sensor

24 VDC

Supply Voltage10 to 30 VDC

Rated Operational Current.....200mA

Degree of Protection.....IP67

Ambient Temperature Range -13°F to 158°F (-25°C to 70°C)

Switching Indication By LED (Yellow)

Output PNP or NPN

120 VDC

Supply Voltage 20 to 140 VAC

Frequency 50 or 60 Hz

Supply Voltage Indication..... By LED (Green)

Rated Operational Current.....400 mA

Degree of Protection.....IP67

Ambient Temperature Range -13°F to 158°F (-25°C - +70°C)

Switching Indication By LED (Orange)

Service Kits: See page 9.

Ordering Information

Model Number Index – B6 Namur Valves (2 and 4 Ported Guns)

Series	Bore Size	Retract (Pre-Stroke) Length	Weld Stroke Length	Valve Block	Valve Block Sensor	Valve Block Operators Retract Valve	Valve Block Operators Weld Stroke Valve	Voltage	Port Type
DP	125	080	30	1	1	S	S	D	N
Blank No Cyl. 080 80mm 100 100mm 125 125mm 140 140mm		Blank No Cyl. 060mm Minimum		Blank No Cyl. 10mm Minimum		Blank No Cyl. 10mm Minimum			
				0 No Valve Block 1 Valve Block Mounted on Cylinder 2 Valve Block w/o Cylinder A Valve Block w/Base Plate X Valve Block for Base Plate Less Base Plate		0 No Sensor 1 PNP Sensor-24 VDC 2 NPN Sensor-24 VDC 3 Sensor-120 VAC		S Single Solenoid D Double Solenoid X Valve Block w/o Pre-Stroke Valve	
						S Single Solenoid D Double Solenoid X Valve Block w/o Weld Stroke Valve		A 120VAC 22mm Coil B 120VAC 30mm Coil D 24VDC 22mm Coil E 24VDC 30mm Coil F 24VDC M12 Connector X Without Valves	

Note: NAMUR valves mounted on valve block have BSPP porting.

Model Selection Examples

Cylinder Only DP1250803000XXXXN
 Cylinder with Valve Block DP1250803011SSDN
 Valve Block Only DP21SSDN

Model Number Index – B6 Namur Valves (3 Ported Guns)

Series	Bore Size	Retract (Pre-Stroke) Length	Weld Stroke Length	Valve Block	Valve Block Sensor	Valve Block Operators Retract Valve	Valve Block Operators Weld Stroke Valve	Voltage	Port Type
DH	125	080	30	1	1	S	S	D	N
Blank No Cyl. 070 70mm 090 90mm 125 125mm 140 140mm		Blank No Cyl. 060mm Minimum		Blank No Cyl. 10mm Minimum		Blank No Cyl. 10mm Minimum			
				0 No Valve Block 1 Valve Block Mounted on Cylinder 2 Valve Block w/o Cylinder 4 Valve Block Quick Exhaust Mounted (w/o base) G Valve Block Quick Exhaust Mounted (w/Base)		0 No Sensor 1 PNP Sensor-24 VDC 2 NPN Sensor-24 VDC 3 Sensor-120 VAC		S Single Solenoid D Double Solenoid X Valve Block w/o Pre-Stroke Valve	
						S Single Solenoid D Double Solenoid X Valve Block w/o Weld Stroke Valve		A 120VAC 22mm Coil B 120VAC 30mm Coil D 24VDC 22mm Coil E 24VDC 30mm Coil F 24VDC M12 Connector X Without Valves	


Note: NAMUR valves mounted on valve block have BSPP porting.

Model Selection Examples


Cylinder Only DH1250803000XXXXN
 Cylinder with Valve Block DH1250803011SSDN
 Valve Block Only DH21SSDN

Ordering Information

Model Number Index – ISO Size 2 Cylinder & Base Plate Mountable (2 and 4 Ported Guns)

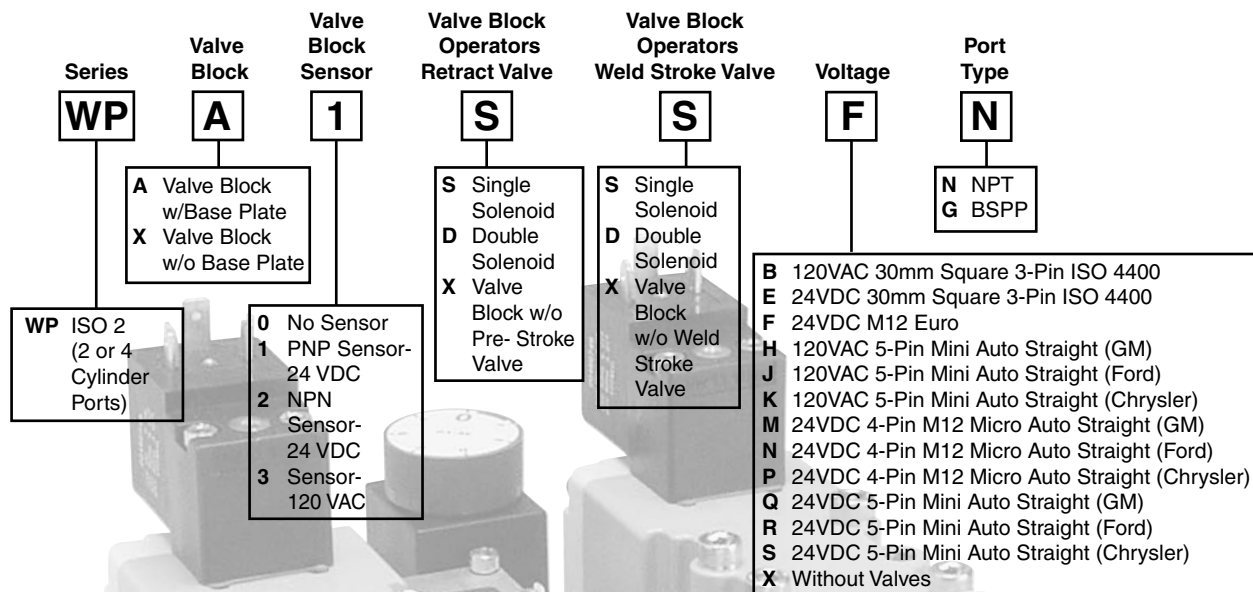

Model Number Index – ISO Size 2 Cylinder & Base Plate Mountable (3 Ported Guns)

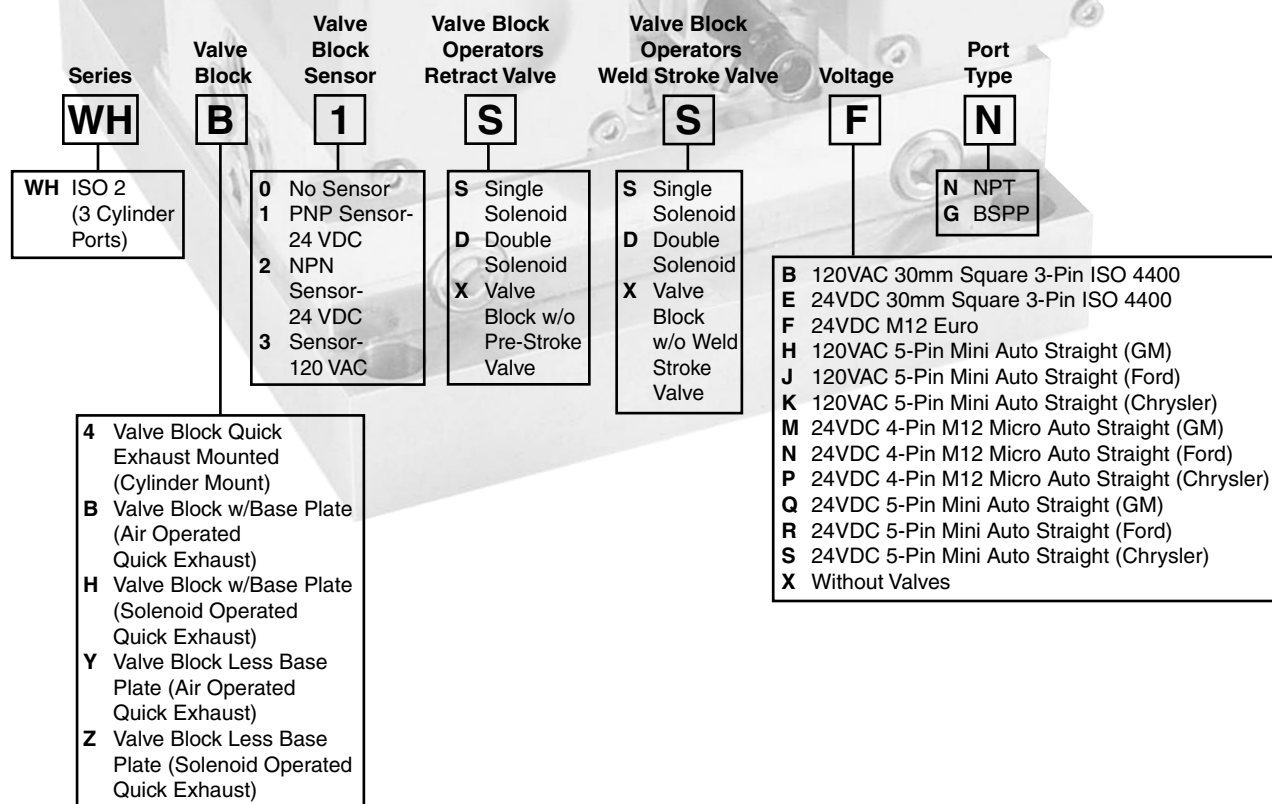

Ordering Information

Model Number Index – ISO Size 2 Manifold Mountable (2 and 4 Ported Guns)

Series	Valve Block	Valve Block Sensor	Valve Block Operators Retract Valve	Valve Block Operators Weld Stroke Valve	Voltage	Port Type
WP	J	1	X	X	X	N
WP ISO 2 (2 or 4 Cylinder Ports)		0 No Sensor 1 PNP Sensor- 24 VDC 2 NPN Sensor- 24 VDC 3 Sensor- 120 VAC	X Valve Block w/o Pre-Stroke Valve	X Valve Block w/o Weld Stroke Valve	X Without Valves	N NPT G BSPP

J Valve Block (Standard)
ISO 2 Manifold Mountable
Plug-In
M Valve Block (Standard)
ISO 2 Manifold Mountable
Non Plug-In

Model Number Index – ISO Size 2 Manifold Mountable (3 Ported Guns)

Series	Valve Block	Valve Block Sensor	Valve Block Operators Retract Valve	Valve Block Operators Weld Stroke Valve	Voltage	Port Type
WH	K	1	X	X	X	N
WH ISO 2 (3 Cylinder Ports)		0 No Sensor 1 PNP Sensor- 24 VDC 2 NPN Sensor- 24 VDC 3 Sensor- 120 VAC	X Valve Block w/o Pre-Stroke Valve	X Valve Block w/o Weld Stroke Valve	X Without Valves	N NPT G BSPP

K Valve Block ISO Manifold
Mountable Plug-In (Air
Operated Quick Exhaust)
L Valve Block ISO Manifold
Mountable Plug-In
(Solenoid Operated Quick
Exhaust)
N Valve Block ISO Manifold
Mountable Non Plug-In (Air
Operated Quick Exhaust)
P Valve Block ISO Manifold
Mountable Non Plug-In
(Solenoid Operated Quick
Exhaust)

Note: ISO Size 2 manifold mountable weld units cannot be ordered with valves or manifold bases. See pages 10 and 11 for valve and manifold base ordering information.

Ordering Information

Model Number Index – 5599-1 CNOMO - Size 2

Basic Series	Operator / Function	Mounting	Pilot Source / Pilot Exhaust	Overrides / Lights	Enclosure / Lead Length	Voltage & Frequency	Wiring Options	Engineering Level																						
H2	E	WX	H	B	L	49	—	C																						
5599-1 Basic Series	5599-1 Operator / Function	5599-1 Mounting	5599-1 Pilot Source / Pilot Exhaust	5599-1 Overrides / Lights	5599-1 Enclosure / Lead Length	5599-1 Automotive Wiring Options	5599-1 Voltage & Frequency	5599-1 Engineering Level																						
H2 ISO 5599-1 Size 2	2 Double Solenoid, 2-Position E Single Solenoid, 2-Position - Air Return, Spring Assist	WX Valve Less Base	H #5 Port / Vented	B Non-Locking, Flush, Push - w/o Light G* Non-Locking, Flush, Push - w/ Light	6* 2-Pin M12 Euro Connector with CNOMO Operator L 3-Pin 30mm DIN 43650A with CNOMO Operator	Blank 000F* None SAE / Ford		C Current																						
* Required with Enclosure "6" Only.																														
<table><tr><th colspan="4">5599-1 Voltage & Frequency</th></tr><tr><th rowspan="2">Code</th><th colspan="2">AC</th><th rowspan="2">DC</th></tr><tr><th>60Hz</th><th>50Hz</th></tr><tr><td>19*</td><td></td><td></td><td>24</td></tr><tr><td>49</td><td></td><td></td><td>24</td></tr><tr><td>53</td><td>120</td><td>120</td><td></td></tr></table>									5599-1 Voltage & Frequency				Code	AC		DC	60Hz	50Hz	19*			24	49			24	53	120	120	
5599-1 Voltage & Frequency																														
Code	AC		DC																											
	60Hz	50Hz																												
19*			24																											
49			24																											
53	120	120																												
* LED & Surge Suppression. Only Available with Enclosure "6".																														

Model Number Index – 5599-1 AUTO - Size 2

Basic Series	Operator / Function	Mounting	Pilot Source / Pilot Exhaust	Overrides / Lights	Enclosure / Lead Length	Voltage & Frequency	Automotive Enclosure	Automotive Wiring Options	Engineering Level
H2	E	WX	H	G	2	B9	000	F	C
5599-1 Basic Series	5599-1 Operator / Function	5599-1 Mounting	5599-1 Pilot Source / Pilot Exhaust	5599-1 Overrides / Lights	5599-1 Enclosure / Lead Length	5599-1 Automotive Wiring Options	5599-1 Automotive Wiring Options	5599-1 Engineering Level	5599-1 Engineering Level
H2 ISO 5599-1 Size 2	2 Double Solenoid, 2-Position E Single Solenoid, 2-Position - Air Return, Spring Assist	WX Valve Less Base	H #5 Port / Vented	G* Non-Locking, Flush, Push - w/ Light	2*† 4-Pin M12 Micro Straight Connector 3* 5-Pin Mini Automotive Straight Connector	C* Chrysler F* SAE / Ford G* General Motors	C* Chrysler F* SAE / Ford G* General Motors	C Current	C Current
* Required with Enclosure "2" & "3".									
5599-1 Voltage & Frequency									
Code	AC		DC	Light & Surge Sup					
	60Hz	50Hz							
B9*			24	LED & Sup					
23	120	115		LED & Sup					
* Solenoid is Blue color.									

Model Number Index – 5599-2 Size 2

Basic Series	Operator / Function	Mounting	Pilot Source / Pilot Exhaust	Overrides / Lights	Enclosure / Lead Length	Voltage & Frequency	Engineering Level
H2	E	VX	H	G	0	B9	C
5599-2 Basic Series		5599-2 Mounting	5599-2 Pilot Source / Pilot Exhaust		5599-2 Enclosure / Lead Length		5599-2 Engineering Level
H2 ISO 5599-2 Size 2		VX Valve Less Base	H #5 Port / Vented		0 None, Remote Pilot Valve or Valve Less Base		C Current
5599-2 Operator / Function				5599-2 Overrides / Lights	5599-2 Voltage & Frequency		
2 Double Solenoid, 2-Position				G Non-Locking, Flush, Push - w/ Light	CodeACDCLight & Surge Sup		
E Single Solenoid, 2-Position - Air Return, Spring Assist					B9*60Hz50Hz24LED & Sup		
					23120115LED & Sup		

* Solenoid is Blue color.

BOLD OPTIONS ARE MOST POPULAR

Ordering Information


Manifold and Subbase Kit Ordering Code

H2 Basic Series	Mounting Base Style / Port Size	Enclosures / Lead Length	Wiring Options	Engineering Level	Factory Designator
PS4111	55	A	—	C	P
		Enclosures / Lead Length 0 None, No Electrical Plug - 5599-1 7† 3-Pin Mini Connector in Base 8†† 4-Pin M12 Micro Connector in Base 9† 5-Pin Mini Connector in Base A 6" Leads C Terminal Block J‡ Circuit Board, Single Address M† Circuit Board, Double Address T* SAM Gen 3.0 Wiring	Wiring Options Blank None C Chrysler F SAE / Ford G General Motors	Engineering Level C Current	
		* Valve Voltage Code "B9" Only. † Must Specify Valve Auto Wiring Option "C", "F", or "G". ‡ Not Available with Subbase Kits.			


Mounting Base Style / Port Size
H2
17 Subbase: 1/2 NPT Side Ports
18* Subbase: 1/2 BSPP Side Ports
57 Manifold: 1/2 NPT End Port
58* Manifold: 1/2 BSPP, End Ports

* BSPP ISO 1179 Specifications.

Subbase Kits

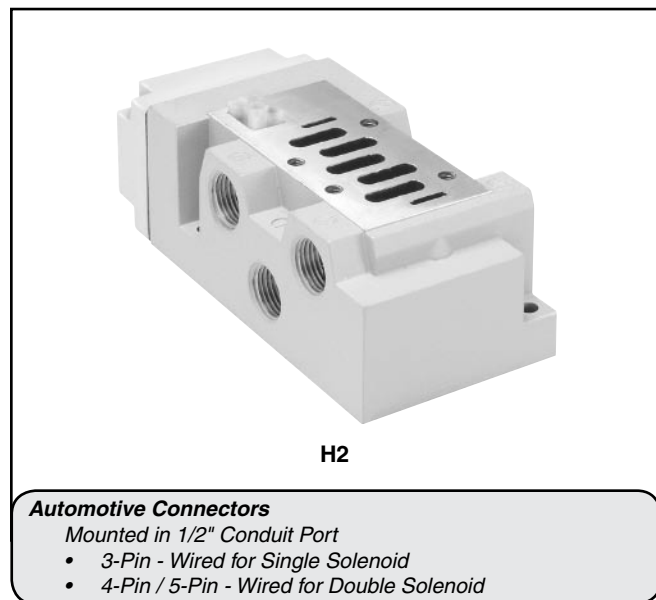


Manifold Kits

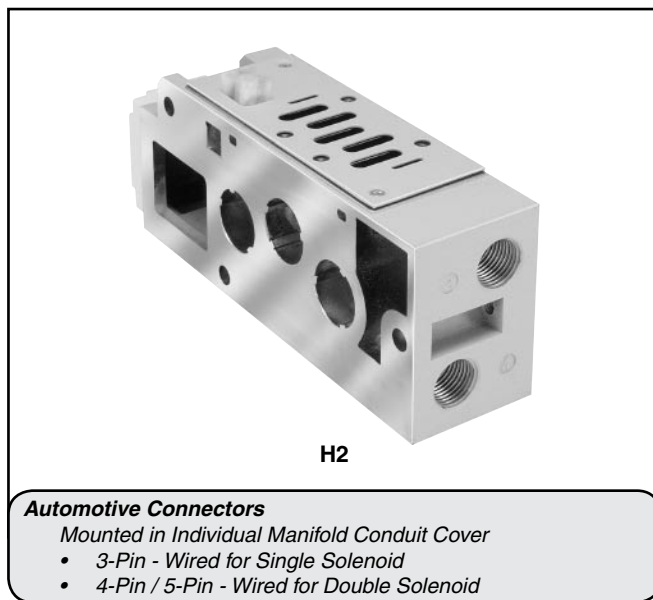


How To Order Add-A-Fold Assemblies

1. List Add-A-Fold Assembly call out. This automatically includes the end plate kit assembly.
2. List complete Valve and Base model number. List left to right, LOOKING AT THE CYLINDER PORTS on the #12 end of the manifold. The left most station is station 1.

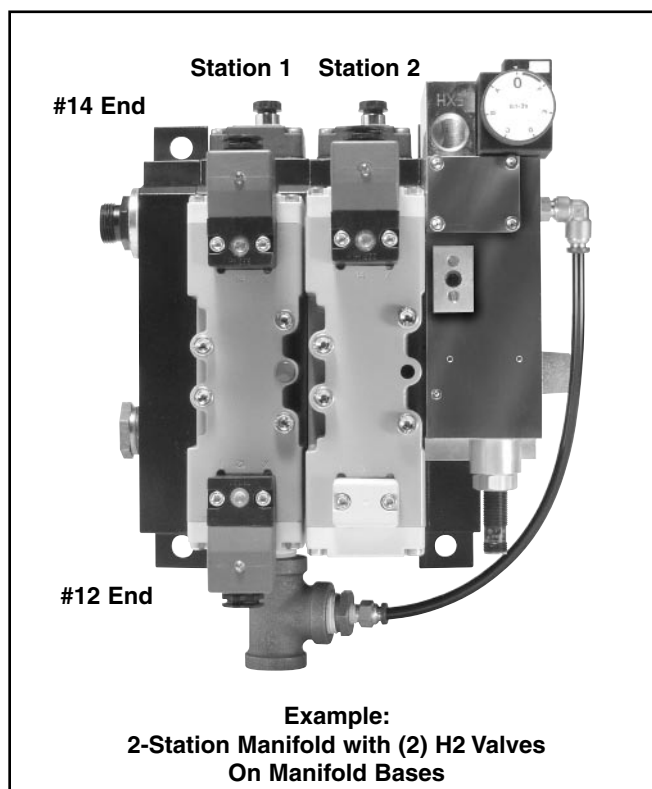

Add-A-Fold Assembly Model Number

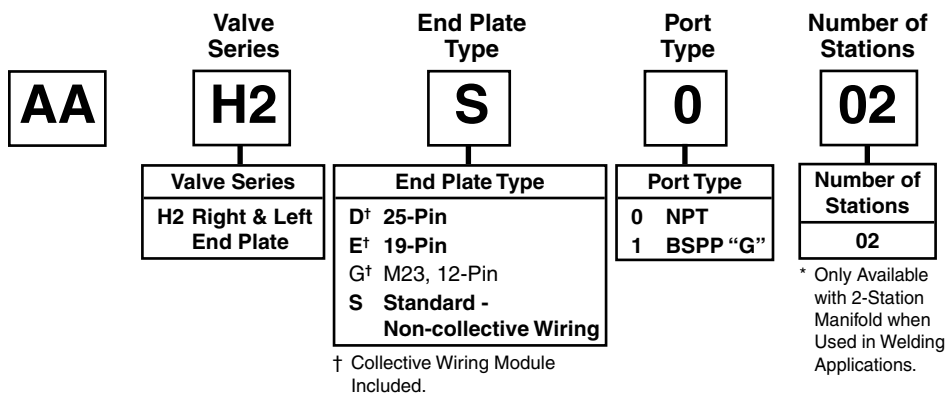

Example


Application requires a 2-Station manifold with weld block and valves, and requires isolation between station 1 and 2 for port #3 galley only.

NOTE: Construct manifold assemblies from left to right while looking at the cylinder ports.

Item	Qty.	Part No.
01	1	AAH2E002
02	1	H22VXHG0B9C Station 1 & 2
03	2	PS411157MCP Station 1 & 2
04	1	WPJ1XXXN Station 2
05	1	H2EVXHG0B9C Station 2
06	1	PS3632P Galley 3 Isolation Between Station 1 & 2

Ordering Information

Model Number Index – Generation 3.0

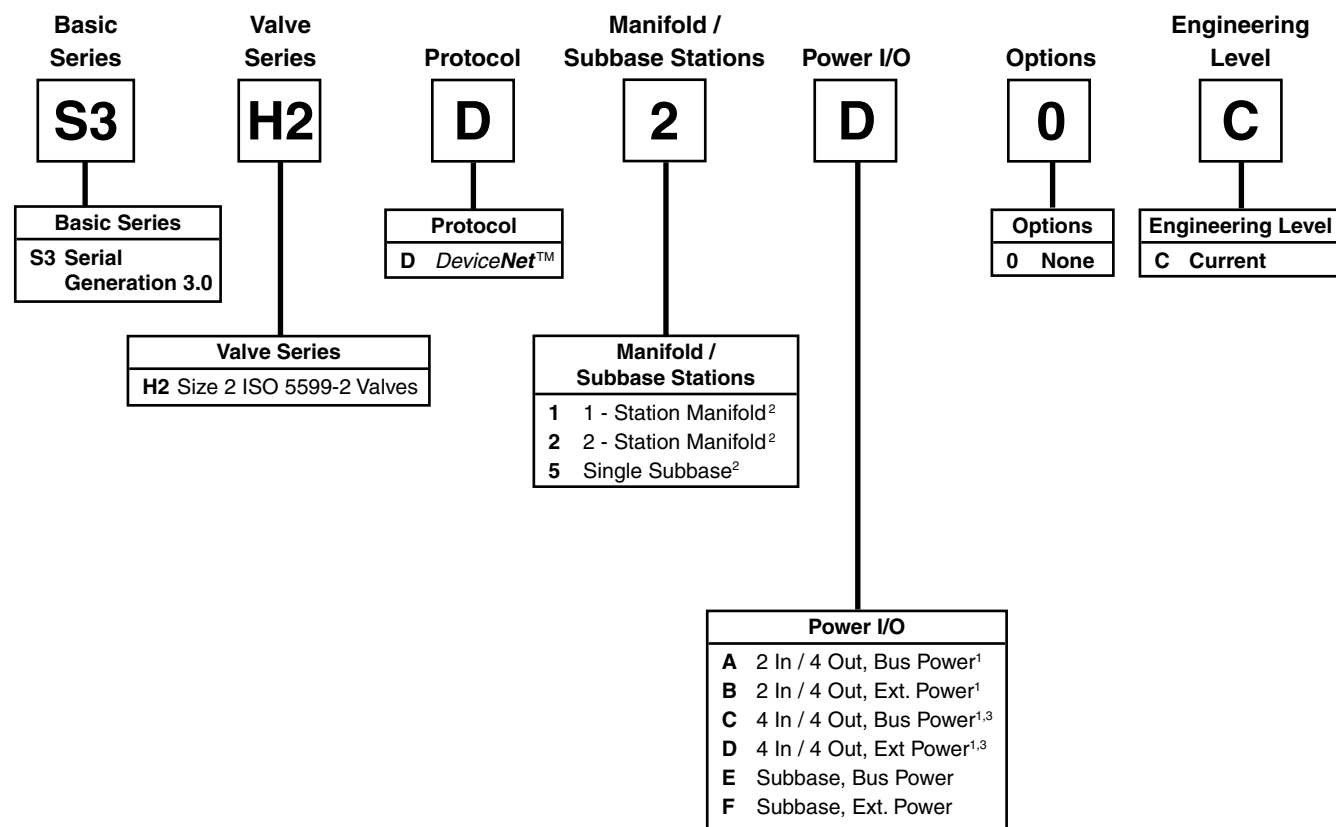

Notes:

1. Not available with single subbase option.
2. 2 inputs come standard with subbase or manifold options.
3. 2 additional auxiliary inputs can be ordered by selecting this option.


Replacement Components

Item	Kit Number	Description	Item	Kit Number	Description
1	6505953	DP/DH Weld Block Sleeve Kit (1 pc.) (Not Shown)	9	3087800	PNP 24 VDC Sensor Kit
2	3534400	Quick Exhaust Kit - High Pressure	10	3527200	NPN 24 VDC Sensor Kit
3	3538600	High Flow Quick Exhaust Kit	11	Contact Parker	120 VAC Sensor Kit
4	PRTF10	Air Operated Timer for High Flow Quick Exh.	12	See page 10	ISO 2 Replacement Valve for WP/WH Weld Blocks
5a	WHQE49	Sol. Oper. Kit for High Flow Quick Exh. 24VDC	13	PS2828A53P	120 VAC 30mm Coil Kit
5b	WHQE53	Sol. Oper. Kit for High Flow Quick Exh. 120VAC	14	PS2828A49P	24 VAC 30mm Coil Kit
6	3059500	Flow Control Kit	15	PS2828619P	24 VDC M12 Euro Coil Kit
7	3059900	Check Valve Kit	16	Contact Parker	B6 Replacement Valve for DP/DH Weld Blocks
8	3087900	Sensor Valve Kit	—	—	—

Ⓐ Lightly grease with provided lubricant.


✓ Inspect for nicks, scratches, and surface imperfections. If present, reduced service life is probable and future replacement should be planned.

Ⓒ Clean with lint-free cloth.

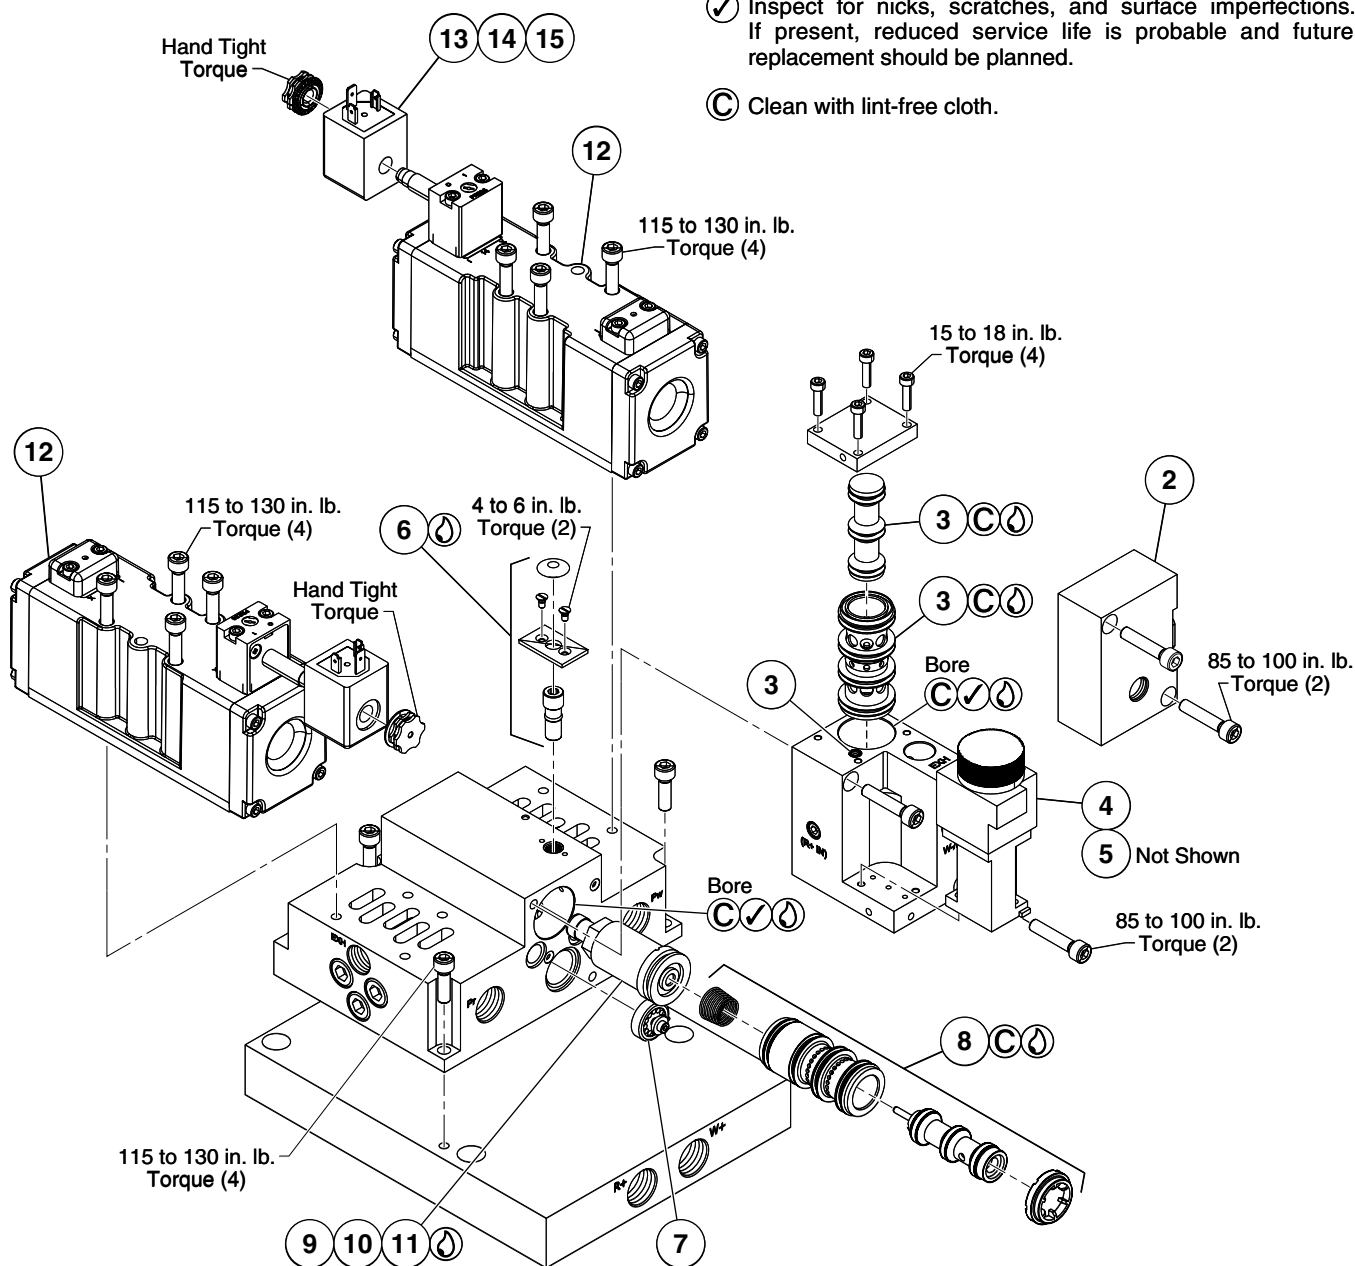


ISO 2 Weld Block - Exploded View




DH Series – 3 Ported Guns Dimensions

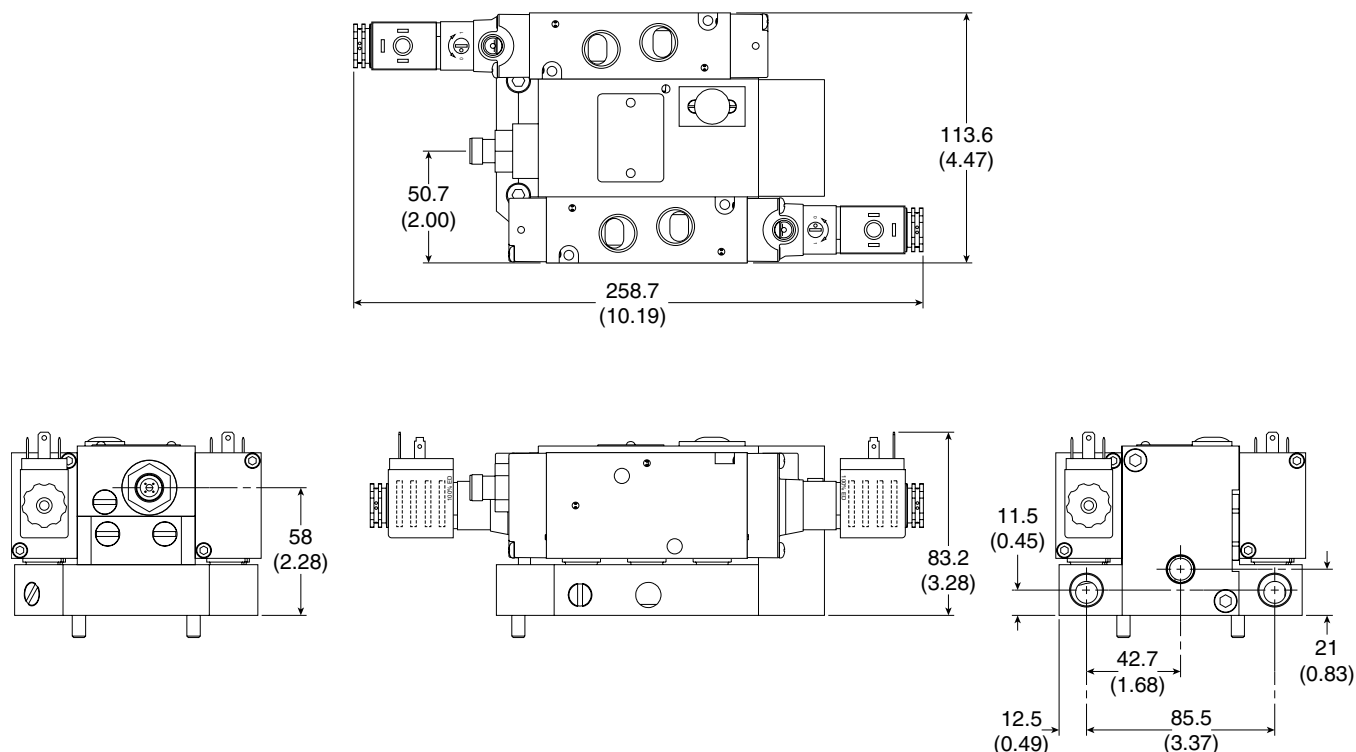






DP Series – 2 and 4 Ported Guns Dimensions

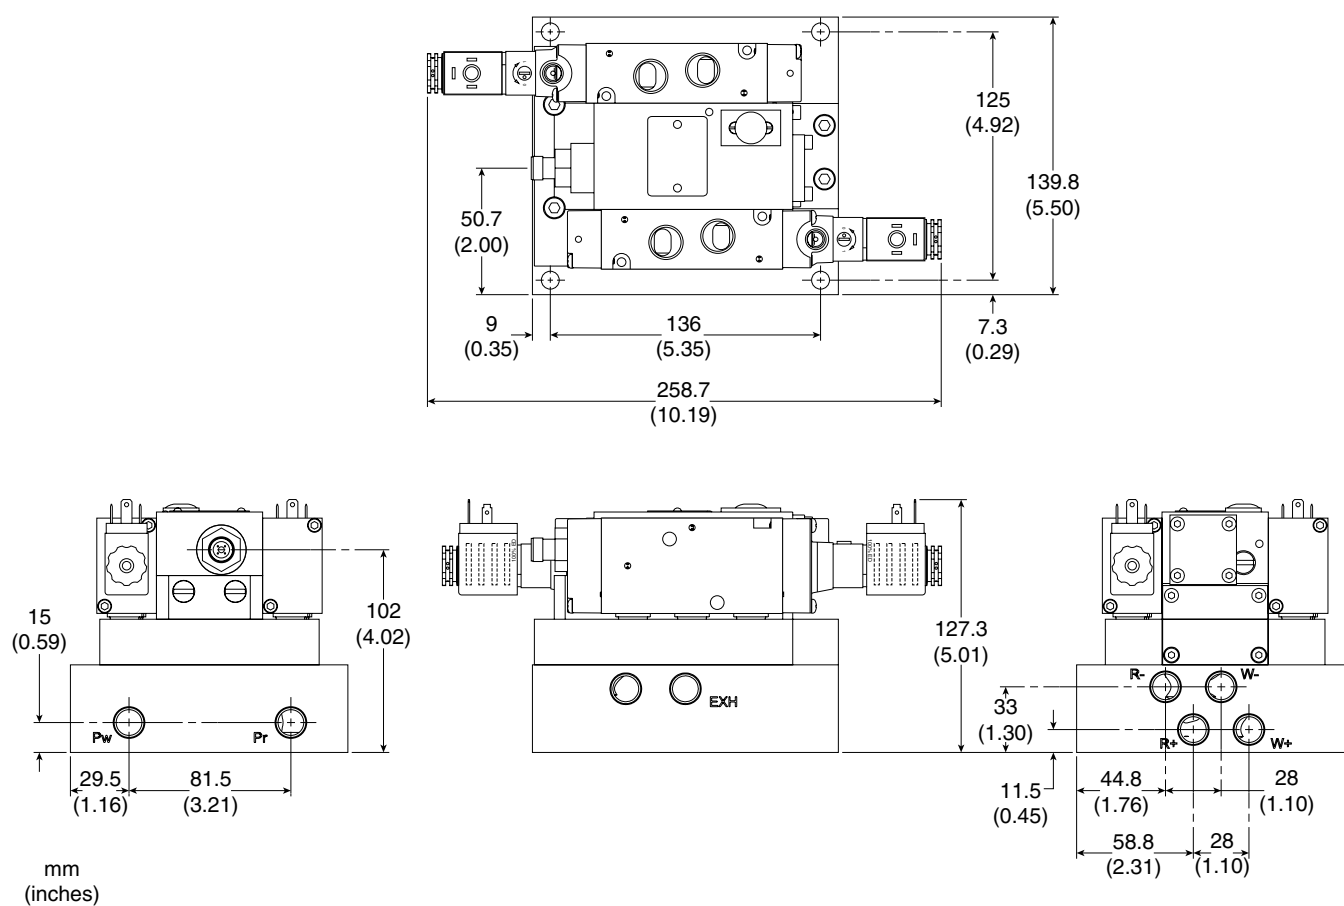



mm
(inches)

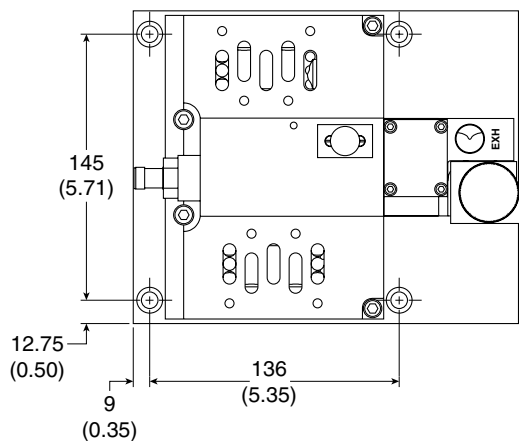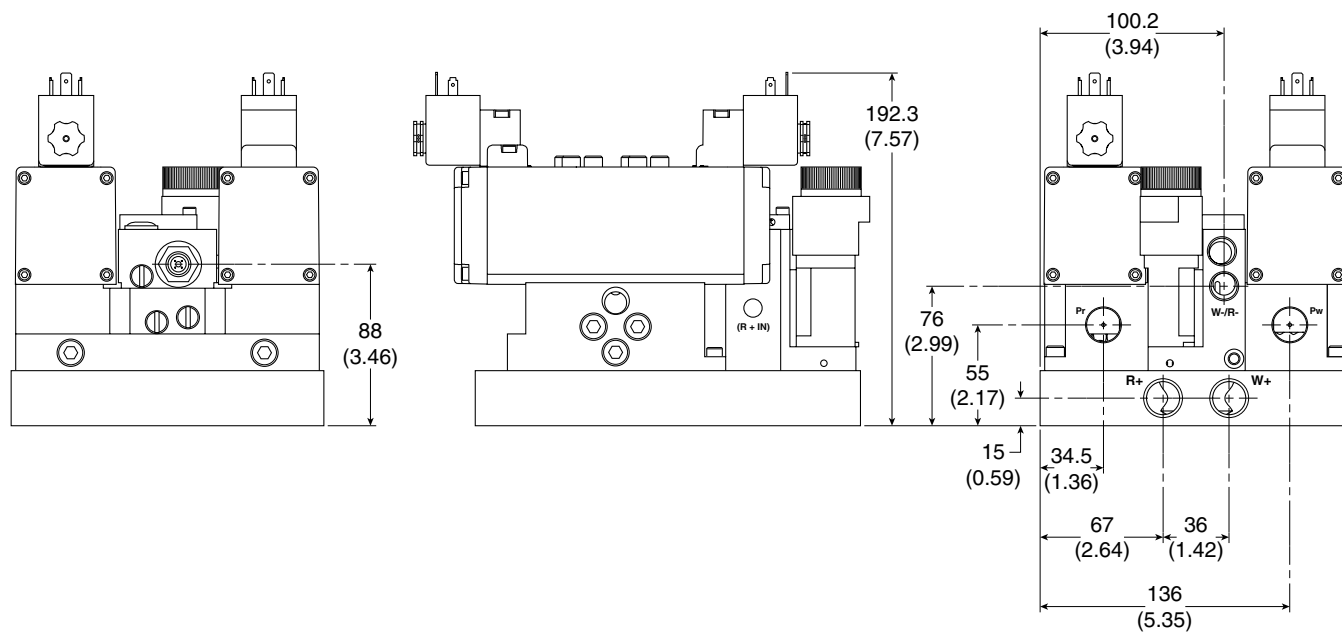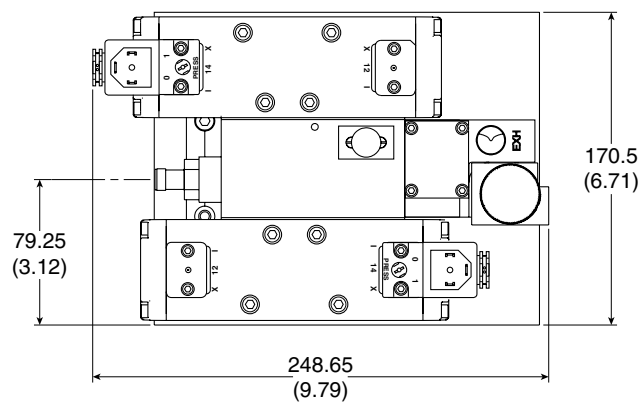WH Series – For 3 Ported Gun Dimensions**WH ISO Size 2 Cylinder & Base Plate
Mountable**

mm
(inches)

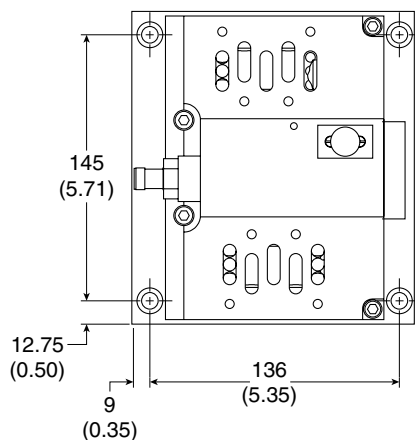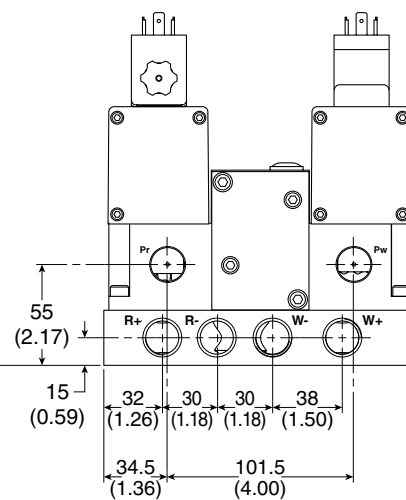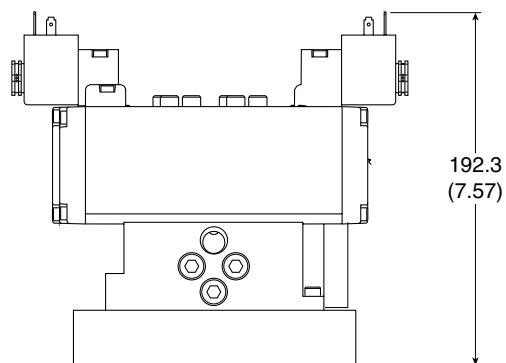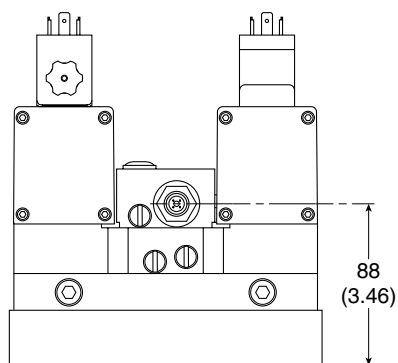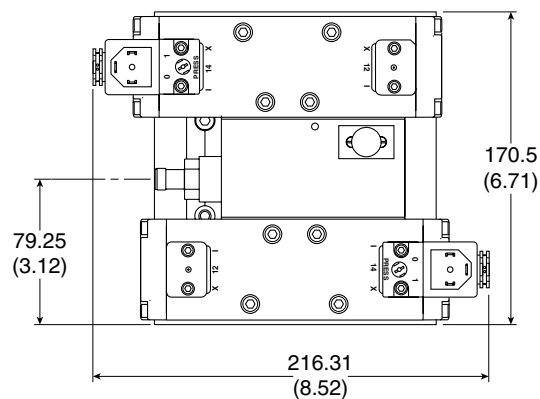WH Series – For 3 Ported Gun Dimensions**WP ISO Size 2 Cylinder & Base Plate
Mountable**

mm
(inches)

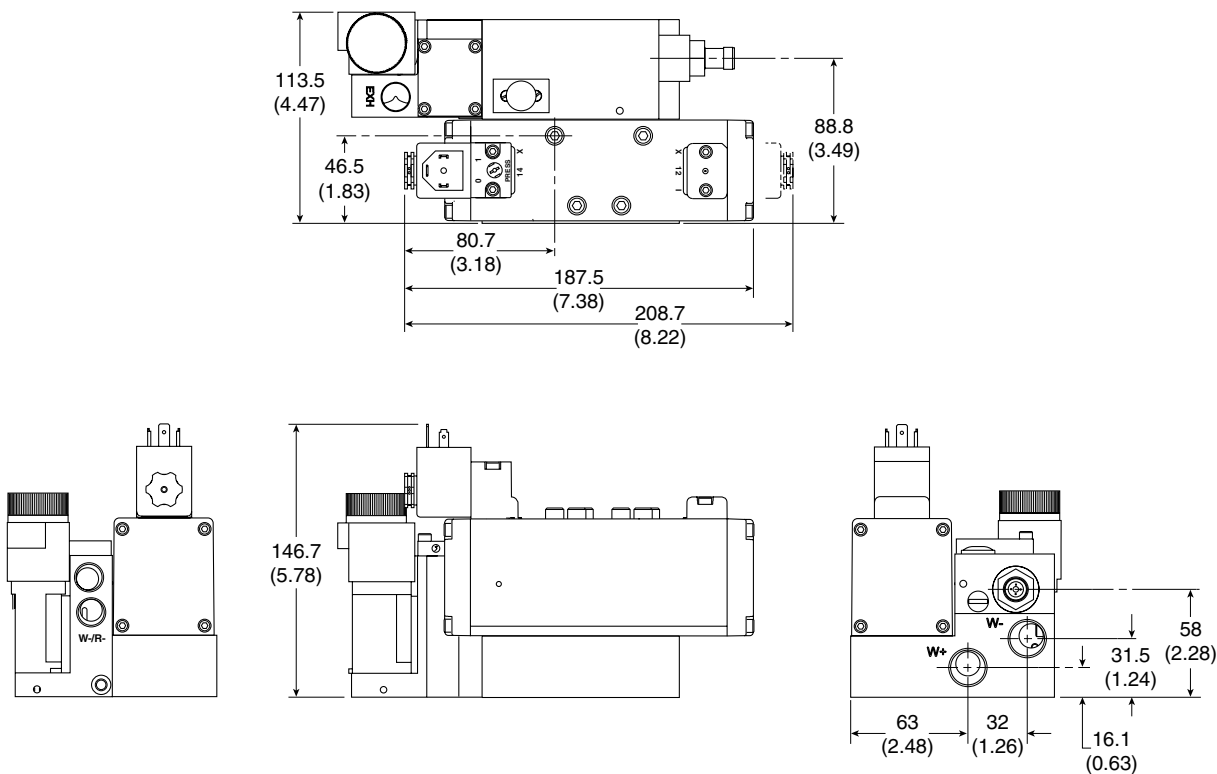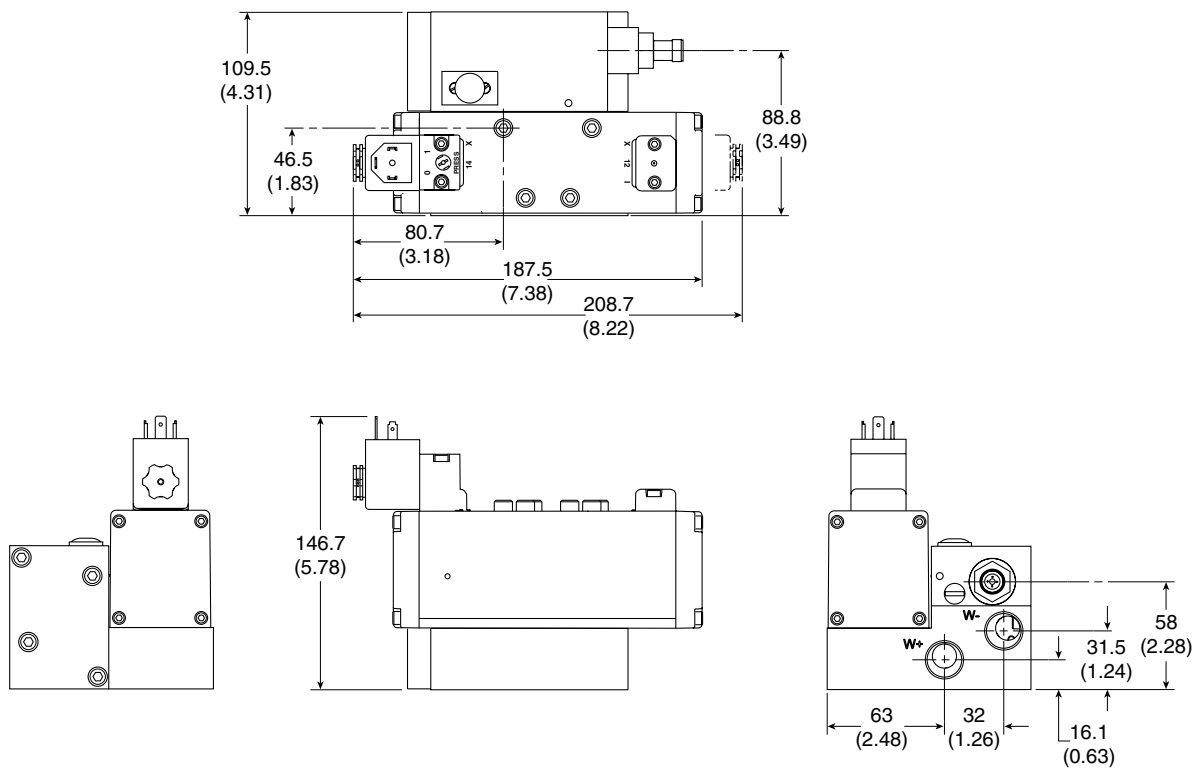WP Series – For 2 & 4 Ported Gun Dimensions**WH ISO Size 2 Manifold Mountable****WP ISO Size 2 Manifold Mountable**

mm
(inches)

Scheduled Maintenance

Silencer – Periodic maintenance of the exhaust mufflers may be required. The frequency of maintenance depends on the environment and condition of the air supply.

Cautions

- Filtrate the inlet air to protect the weld block against contaminating matter typically found in compressed air systems (i.e. rust, water, compressor oil, or other foreign particles). A standard 40 micron filter is recommended.

If liquid aerosols, both water and oil, and submicron particulate matter need to be removed from your air system, then a coalescing filter is required.

- The inlet compressed air must be filtered, regulated, and periodically maintained to ensure maximum operating performance and warranty.

Weld Block Troubleshooting

Always verify that air and electrical are connected properly per Installation Instructions on page 4. At startup, cylinder should be open fully with no electrical signal to solenoids. All air lines, filters, regulators, tubing, hoses, fittings and electrical cables should be in good working condition as specified in automotive plant maintenance schedule.

1. Cylinder does not extend / retract.

- Does the cylinder move using manual overrides?
 - If yes, then check electrical conditions. Check the following:
 - Solenoid connections
 - Coils – replace if necessary
 - PLC program

- If no, does the cylinder move freely with air turned off?
 - If no, then cylinder should be repaired / replaced.
 - If yes, is the flow control open?
 - If no, open flow control. See Setup Instructions on page 5.
 - If yes, verify with gauges that there is pressure on back side of cylinder when valve shifts. There is a possibility that the metering of exhaust air on the front side of the cylinder, due to the flow control, is creating a “Joe Block” effect occurring between the piston face and cylinder. Contact Parker Representative for assistance.
 - If yes, replace valves on System

2. Cylinder tips close too fast / slow.

- Adjust flow control. See Setup Instructions on page 5.
- Quick Exhaust only – Adjust air timer on quick exhaust.
- Check muffler for proper operation. If covered with weld slag, then replace muffler.

3. Weld gun does not fire weld.

- Is cable connected to sensor?
 - If no, connect to sensor
 - If yes, is cable connected to PLC?
 - If no, wire to controller
 - If yes, check PLC program on location of weld signal to start weld. Also verify feedback sensor is operating properly.

4. Weld gun fires before tips are closed

- Adjust flow control so that weld tips close slower. See Setup Instructions on page 5.
- Is sensor input in the PLC correct? See Setup Instructions on page 5.

Warnings

WARNING

To avoid unpredictable system behavior that can cause personal injury and property damage:

- Disconnect electrical supply (when necessary) before installation, servicing, or conversion.
- Disconnect air supply and depressurize all air lines connected to this product before installation, servicing, or conversion.
- Operate within the manufacturer's specified pressure, temperature, and other conditions listed in these instructions.
- Medium must be moisture-free if ambient temperature is below freezing.
- Service according to procedures listed in these instructions.
- Installation, service, and conversion of these products must be performed by knowledgeable personnel who understand how pneumatic products are to be applied.
- After installation, servicing, or conversion, air and electrical supplies (when necessary) should be connected and the product tested for proper function and leakage. If audible leakage is present, or the product does not operate properly, do not put into use.
- Warnings and specifications on the product should not be covered by paint, etc. If masking is not possible, contact your local representative for replacement labels.

WARNING

FAILURE OR IMPROPER SELECTION OR IMPROPER USE OF THE PRODUCTS AND/OR SYSTEMS DESCRIBED HEREIN OR RELATED ITEMS CAN CAUSE DEATH, PERSONAL INJURY AND PROPERTY DAMAGE.

This document and other information from Parker Hannifin Corporation, its subsidiaries and authorized distributors provide product and/or system options for further investigation by users having technical expertise. It is important that you analyze all aspects of your application, including consequences of any failure and review the information concerning the product or systems in the current product catalog. Due to the variety of operating conditions and applications for these products or systems, the user, through its own analysis and testing, is solely responsible for making the final selection of the products and systems and assuring that all performance, safety and warning requirements of the application are met.

The products described herein, including without limitation, product features, specifications, designs, availability and pricing, are subject to change by Parker Hannifin Corporation and its subsidiaries at any time without notice.

EXTRA COPIES OF THESE INSTRUCTIONS ARE AVAILABLE FOR INCLUSION IN EQUIPMENT / MAINTENANCE MANUALS THAT UTILIZE THESE PRODUCTS. CONTACT YOUR LOCAL REPRESENTATIVE.

The items described in this document and other documents or descriptions provided by Parker Hannifin Corporation, its subsidiaries and its authorized distributors, are hereby offered for sale at prices to be established by Parker Hannifin Corporation, its subsidiaries and its authorized distributors. This offer and its acceptance by any customer ("Buyer") shall be governed by all of the following Terms and Conditions. Buyer's order for any such item, when communicated to Parker Hannifin Corporation, its subsidiaries or an authorized distributor ("Seller") verbally or in writing, shall constitute acceptance of this offer.

1. Terms and Conditions of Sale: All descriptions, quotations, proposals, offers, acknowledgments, acceptances and sales of Seller's products are subject to and shall be governed exclusively by the terms and conditions stated herein. Buyer's acceptance of any offer to sell is limited to these terms and conditions. Any terms or conditions in addition to, or inconsistent with those stated herein, proposed by Buyer in any acceptance of an offer by Seller, are hereby objected to. No such additional, different or inconsistent terms and conditions shall become part of the contract between Buyer and Seller unless expressly accepted in writing by Seller. Seller's acceptance of any offer to purchase by Buyer is expressly conditional upon Buyer's assent to all the terms and conditions stated herein, including any terms in addition to, or inconsistent with those contained in Buyer's offer. Acceptance of Seller's products shall in all events constitute such assent.

2. Payment: Payment shall be made by Buyer net 30 days from the date of delivery of the items purchased hereunder. Amounts not timely paid shall bear interest at the maximum rate permitted by law for each month or portion thereof that the Buyer is late in making payment. Any claims by Buyer for omissions or shortages in a shipment shall be waived unless Seller receives notice thereof within 30 days after Buyer's receipt of the shipment.

3. Delivery: Unless otherwise provided on the face hereof, delivery shall be made F.O.B. Seller's plant. Regardless of the method of delivery, however, risk of loss shall pass to Buyer upon Seller's delivery to a carrier. Any delivery dates shown are approximate only and Seller shall have no liability for any delays in delivery.

4. Warranty: Seller warrants that the items sold hereunder shall be free from defects in material or workmanship for a period of 18 months from date of shipment from Parker Hannifin Corporation. THIS WARRANTY COMPRISES THE SOLE AND ENTIRE WARRANTY PERTAINING TO ITEMS PROVIDED HEREUNDER. SELLER MAKES NO OTHER WARRANTY, GUARANTEE, OR REPRESENTATION OF ANY KIND WHATSOEVER. ALL OTHER WARRANTIES, INCLUDING BUT NOT LIMITED TO, MERCHANTABILITY AND FITNESS FOR PURPOSE, WHETHER EXPRESS, IMPLIED, OR ARISING BY OPERATION OF LAW, TRADE USAGE, OR COURSE OF DEALING ARE HEREBY DISCLAIMED.

NOTWITHSTANDING THE FOREGOING, THERE ARE NO WARRANTIES WHATSOEVER ON ITEMS BUILT OR ACQUIRED WHOLLY OR PARTIALLY, TO BUYER'S DESIGN OR SPECIFICATIONS.

5. Limitation of Remedy: SELLER'S LIABILITY ARISING FROM OR IN ANY WAY CONNECTED WITH THE ITEMS SOLD OR THIS CONTRACT SHALL BE LIMITED EXCLUSIVELY TO REPAIR OR REPLACEMENT OF THE ITEMS SOLD OR REFUND OF THE PURCHASE PRICE PAID BY BUYER, AT SELLER'S SOLE OPTION. IN NO EVENT SHALL SELLER BE LIABLE FOR ANY INCIDENTAL, CONSEQUENTIAL OR SPECIAL DAMAGES OF ANY KIND OR NATURE WHATSOEVER, INCLUDING BUT NOT LIMITED TO LOST PROFITS ARISING FROM OR IN ANY WAY CONNECTED WITH THIS AGREEMENT OR ITEMS SOLD HEREUNDER, WHETHER ALLEGED TO ARISE FROM BREACH OF CONTRACT, EXPRESS OR IMPLIED WARRANTY, OR IN TORT, INCLUDING WITHOUT LIMITATION, NEGLIGENCE, FAILURE TO WARN OR STRICT LIABILITY.

6. Changes, Reschedules and Cancellations: Buyer may request to modify the designs or specifications for the items sold hereunder as well as the quantities and delivery dates thereof, or may request to cancel all or part of this order, however, no such requested modification or cancellation shall become part of the contract between Buyer and Seller unless accepted by Seller in a written amendment to this Agreement. Acceptance of any such requested modification or cancellation shall be at Seller's discretion, and shall be upon such terms and conditions as Seller may require.

7. Special Tooling: A tooling charge may be imposed for any special tooling, including without limitations, dies, fixtures, molds and patterns, acquired to manufacture items sold pursuant to this contract. Such special tooling shall be and remain Seller's property notwithstanding payment of any charges by Buyer. In no event will Buyer acquire any interest in apparatus belonging to Seller which is utilized in the manufacture of the items sold hereunder, even if such apparatus has been specially converted or adapted for such manufacture and notwithstanding any charges paid by Buyer. Unless otherwise agreed, Seller shall have the right

to alter, discard or otherwise dispose of any special tooling or other property in its sole discretion at any time.

8. Buyer's Property: Any designs, tools, patterns, materials, drawings, confidential information or equipment furnished by Buyer, or any other items which become Buyer's property, may be considered obsolete and may be destroyed by Seller after two (2) consecutive years have elapsed without Buyer placing an order for the items which are manufactured using such property. Seller shall not be responsible for any loss or damage to such property while it is in Seller's possession or control.

9. Taxes: Unless otherwise indicated on the face hereof, all prices and charges are exclusive of excise, sales, use, property, occupational or like taxes which may be imposed by any taxing authority upon the manufacture, sale or delivery of the items sold hereunder. If any such taxes must be paid by Seller or if Seller is liable for the collection of such tax, the amount thereof shall be in addition to the amounts for the items sold. Buyer agrees to pay all such taxes or to reimburse Seller therefore upon receipt of its invoice. If Buyer claims exemption from any sales, use or other tax imposed by any taxing authority, Buyer shall save Seller harmless from and against any such tax, together with any interest or penalties thereon which may be assessed if the items are held to be taxable.

10. Indemnity For Infringement of Intellectual Property Rights: Seller shall have no liability for infringement of any patents, trademarks, copyrights, trade dress, trade secrets or similar rights except as provided in this Part 10. Seller will defend and indemnify Buyer against allegations of infringement of U.S. patents, U.S. trademarks, copyrights, trade dress and trade secrets (hereinafter "Intellectual Property Rights"). Seller will defend at its expense and will pay the cost of any settlement or damages awarded in an action brought against Buyer based on an allegation that an item sold pursuant to this contract infringes the Intellectual Property Rights of a third party. Seller's obligation to defend and indemnify Buyer is contingent on Buyer notifying Seller within ten (10) days after Buyer becomes aware of such allegations of infringement, and Seller having sole control over the defense of any allegations or actions including all negotiations for settlement or compromise. If an item sold hereunder is subject to a claim that it infringes the Intellectual Property Rights of a third party, Seller may, at its sole expense and option, procure for Buyer the right to continue using said item, replace or modify said item so as to make it noninfringing, or offer to accept return of said item and return the purchase price less a reasonable allowance for depreciation. Notwithstanding the foregoing, Seller shall have no liability for claims of infringement based on information provided by Buyer, or directed to items delivered hereunder for which the designs are specified in whole or part by Buyer, or infringements resulting from the modification, combination or use in a system of any item sold hereunder. The foregoing provisions of this Part 10 shall constitute Seller's sole and exclusive liability and Buyer's sole and exclusive remedy for infringement of Intellectual Property Rights.

If a claim is based on information provided by Buyer or if the design for an item delivered hereunder is specified in whole or in part by Buyer, Buyer shall defend and indemnify Seller for all costs, expenses or judgements resulting from any claim that such item infringes any patent, trademark, copyright, trade dress, trade secret or any similar right.

11. Force Majeure: Seller does not assume the risk of and shall not be liable for delay or failure to perform any of Seller's obligations by reason of circumstances beyond the reasonable control of Seller (hereinafter "Events of Force Majeure"). Events of Force Majeure shall include without limitation, accidents, acts of God, strikes or labor disputes, acts, laws, rules or regulations of any government or government agency, fires, floods, delays or failures in delivery of carriers or suppliers, shortages of materials and any other cause beyond Seller's control.

12. Entire Agreement/Governing Law: The terms and conditions set forth herein, together with any amendments, modifications and any different terms or conditions expressly accepted by Seller in writing, shall constitute the entire Agreement concerning the items sold, and there are no oral or other representations or agreements which pertain thereto. This Agreement shall be governed in all respects by the law of the State of Ohio. No actions arising out of sale of the items sold hereunder or this Agreement may be brought by either party more than two (2) years after the cause of action accrues.



Parker Hannifin Corporation
Pneumatic Division
8676 E. M89
P.O. Box 901
Richland, MI 49083 USA
Tel: (269) 629-5000
Fax: (269) 629-5385

Customer/Technical Service

Tel: (269) 629-5575
Fax: (269) 629-5385
Web site: www.parker.com/pneumatics
E-mail: PDNMTKG@parker.com